

**100 mA, high input voltage LDO Linear Regulators HK71XX Series**


**General Description**

HK71XX series are low-dropout linear voltage regulators with a built-in voltage reference module, error correction module and phase compensation module. HK71XX series are based on the CMOS process and allow high voltage input with low quiescent current. This series has the function of internal feedback resistor setting from 3.0V to 5.0V. The output accuracy is  $\pm 2\%$ .

**Features**

- High output accuracy:  $\pm 2\%$
- Input voltage: up to 18 V
- Output voltage: 3.0 V ~ 5.0V
- Ultra-low quiescent current (Typ. = 3  $\mu$  A)
- Output Current:  $I_{out} = 100mA$   
(When  $V_{in} = 7V$  and  $V_{out} = 5V$ )
- Importation good stability: Typ. 0.05% / V
- Low temperature coefficient
- Ceramic capacitor can be used
- Package: SOT89-3、TO92


**Selection Guide**

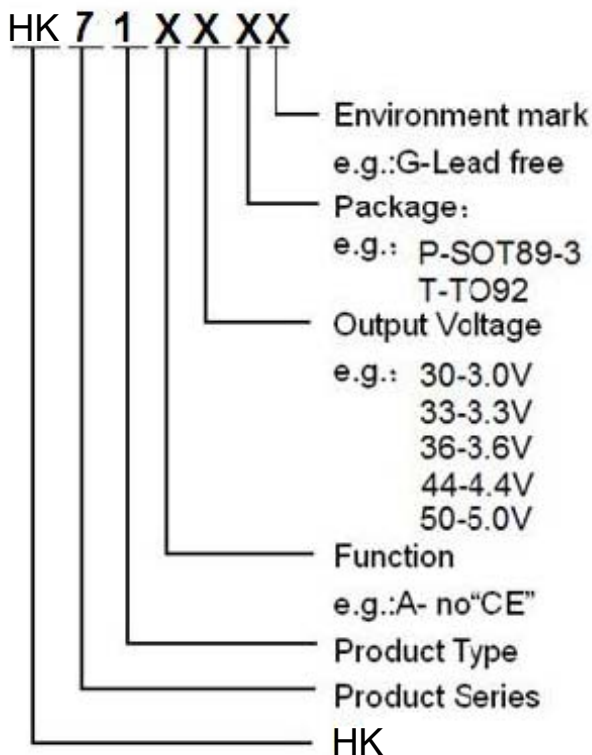


**Typical Application**

- Electronic weighbridge
- SCM
- Phones, cordless phones
- Security Products
- Water meters, power meters

**Typical Application Circuit**

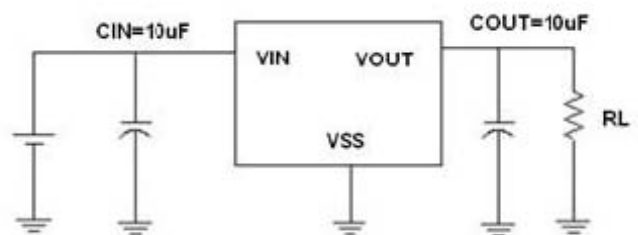

## Pin Configuration

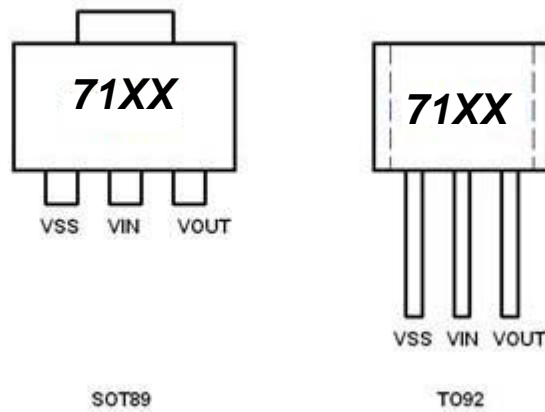

21


## Pin Assignment

### HK7150

Pin Number		Pin Name	Functions
SOT89-3	TO92		
1	1	$V_{SS}$	Ground
2	2	$V_{IN}$	Power Input
3	3	$V_{OUT}$	Output

## Absolute Maximum Ratings

Parameter	Symbol	Ratings	Units
Input Voltage	$V_{IN}$	18	V
Output Current	$I_{OUT}$	100	mA
Output Voltage	$V_{OUT}$	$V_{SS}-0.3 \sim V_{IN} + 0.3$	V
Power Dissipation	SOT89-3	$P_D$	500
	TO92		500
Operating Temperature Range	$T_{OPR}$	$-40 \sim +85$	$^{\circ}C$
Storage Temperature Range	$T_{STG}$	$-40 \sim +125$	$^{\circ}C$
Lead Temperature		$260^{\circ}C, 10sec$	

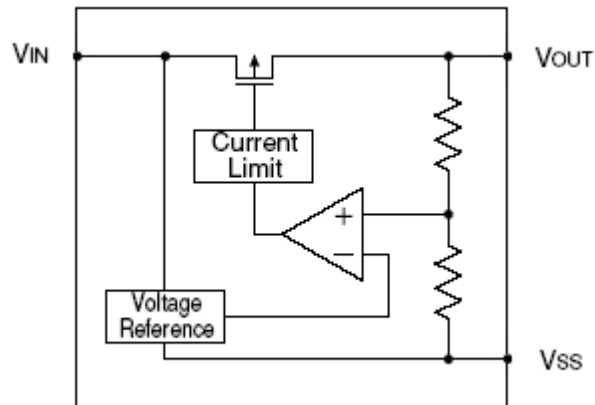**Block Diagram**

**Electrical Characteristics**
**HK71XX**

 ( $V_{IN} = V_{OUT} + 2.0V$ ,  $C_{IN} = C_L = 10\mu F$ ,  $T_a = 25^\circ C$ , unless otherwise noted)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Output Voltage	$V_{OUT(E)}$ (Note 2)	$I_{OUT} = 40mA$ , $V_{IN} = V_{OUT} + 2V$	X 0.98	$V_{OUT(T)}$ (Note 1)	X 1.02	V
Input Voltage	$V_{IN}$				18	V
Maximum Output Current	$I_{OUT\_max}$	$V_{IN} = V_{OUT} + 2V$	150			mA
Load Regulation	$\Delta V_{OUT}$	$V_{IN} = V_{OUT} + 2V$ , $1mA \leq I_{OUT} \leq 100mA$		10		mV
Dropout Voltage (Note 3)	$V_{dif1}$	$I_{OUT} = 50mA$		250		mV
	$V_{dif2}$	$I_{OUT} = 100mA$		500		mV
Supply Current	$I_{SS}$	$V_{IN} = V_{OUT} + 2V$		3		$\mu A$
Line Regulations	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	$I_{OUT} = 40mA$ $V_{OUT} + 2V \leq V_{IN} \leq 18V$		0.05		%/V


Note :

- $V_{OUT(T)}$  : Specified Output Voltage
- $V_{OUT(E)}$  : Effective Output Voltage ( ie. The output voltage when " $V_{OUT(T)} + 2.0V$ " is provided at the Vin pin while maintaining a certain  $I_{OUT}$  value.)
- $V_{DIF}$ :  $V_{IN1} - V_{OUT(E)}$   
 $V_{IN1}$  : The input voltage when  $V_{OUT(E)}$  appears as input voltage is gradually decreased.  
 $V_{OUT(E)}$  = A voltage equal to 98% of the output voltage whenever an amply stabilized  $I_{OUT}$  and  $\{V_{OUT(T)} + 2.0V\}$  is input.

## Type Characteristics


(1) Output Current VS. Output Voltage (  $T_a = 25\text{ }^\circ\text{C}$  )

HK7150

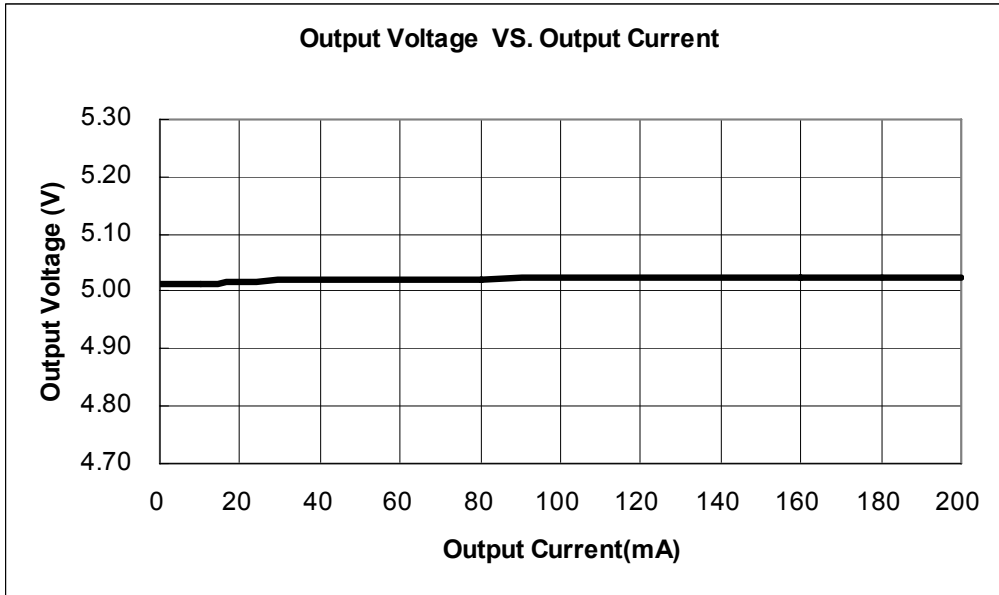


(2) Input Voltage VS. Output Voltage (  $T_a = 25\text{ }^\circ\text{C}$  )

HK7150

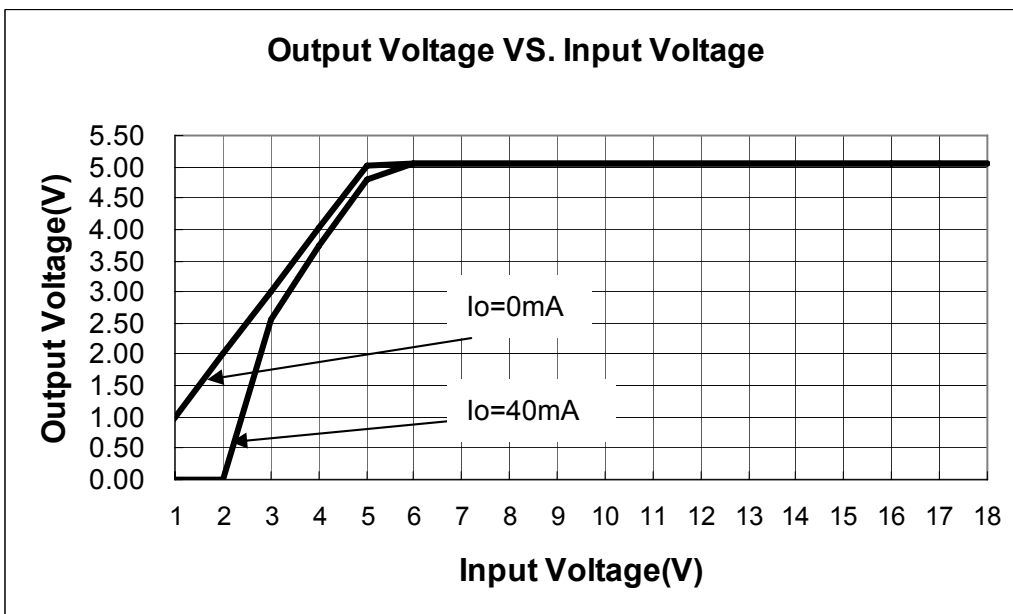


(3) Output Current VS. Dropout Voltage (  $T_a = 25\text{ }^\circ\text{C}$  )

HK7150

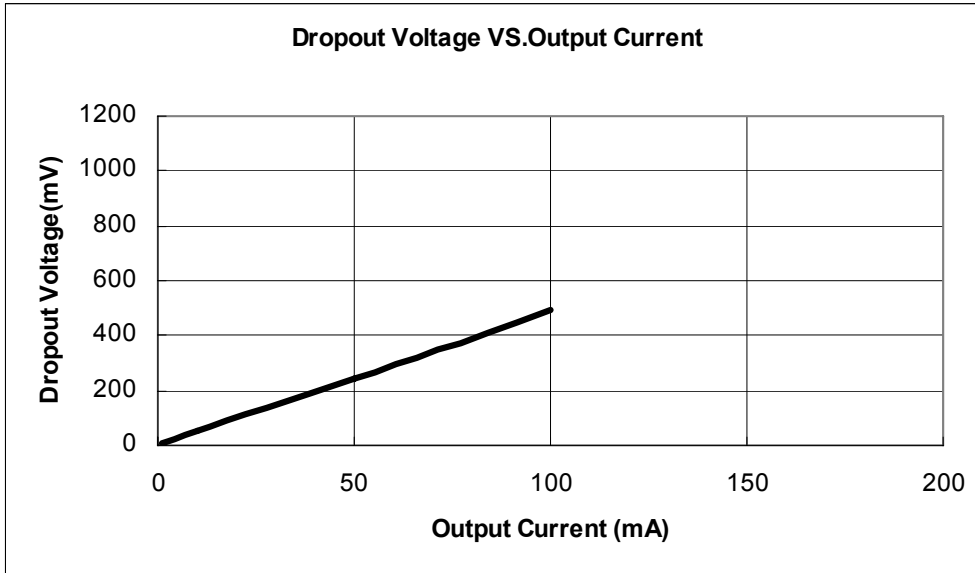


(4) Input Voltage VS. Supply Current (  $T_a = 25\text{ }^\circ\text{C}$  )

HK7150

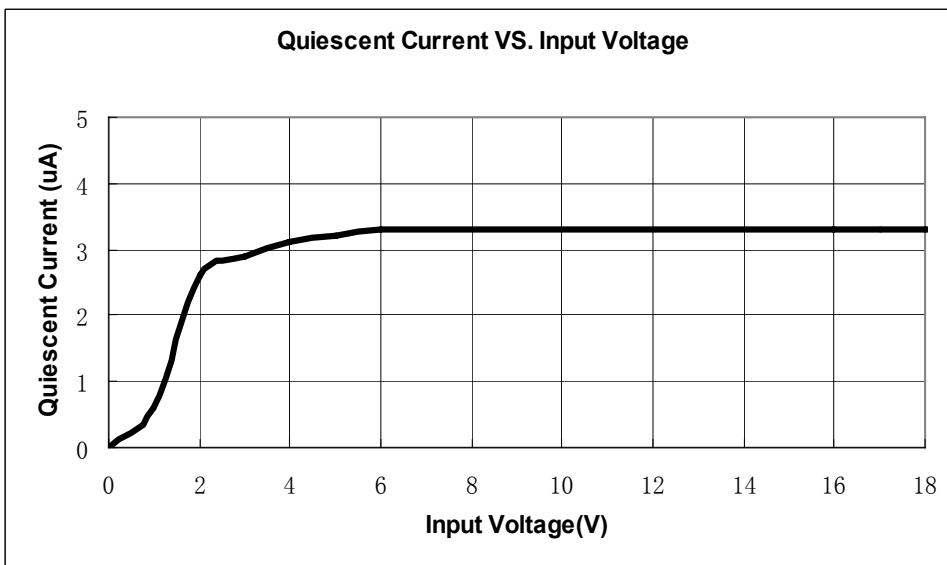

**Packaging Information**

## ● SOT89-3

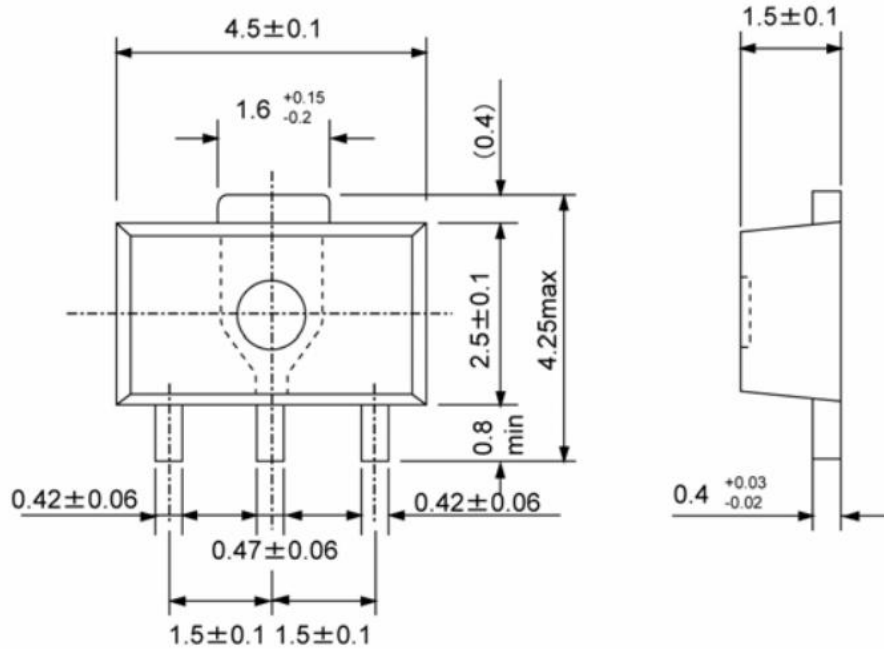

## ● TO-92

