



## UC3666

Preliminary


CMOS IC

### DUAL CHANNEL 1A HIGH EFFICIENCY STEP-DOWN DC/DC CONVERTER

#### DESCRIPTION

The UTC **UC3666** is a dual channel high efficiency step-down DC/DC converter with constant frequency and current mode. A main switch and a synchronous rectifier for high efficiency are contained in each converter, and thus an external Schottky diode is saved. The output voltage can be adjusted to as low as 0.6V. With input voltage range from 2.5V ~ 5.5V , each converter can deliver 1A current to the load. Due to the internally fixed 1.6MHz switching frequency, small surface mount inductors and capacitors can be used.

The UTC **UC3666** is generally used in digital still cameras, portable instruments, slim-type DVD, microprocessors and DSP core supplies, wireless and DSL card, PDAs, smart phones, cellular telephones and so on.

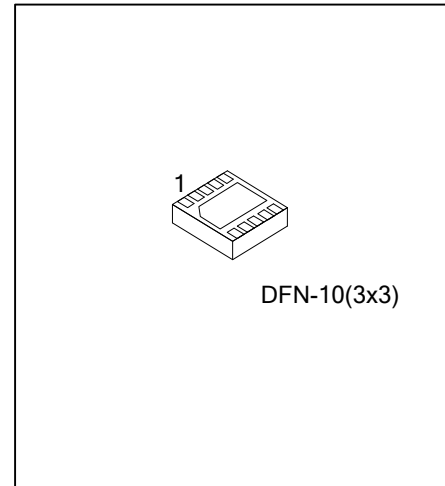

#### FEATURES


- \* high efficiency
- \* Current mode operation
- \* Input voltage varying from 2.5V to 5.5V
- \* Output current on each channel: 1A
- \* Fixed frequency operation
- \* 0.6V reference allows low output voltages
- \* Over-temperature protection circuit
- \* RoHS Compliant (100% green available)

#### ORDERING INFORMATION


Ordering Number	Package	Packing
UC3666G-K10-3030-R	DFN-10(3×3)	Tape Reel

<p>UC3666G-K10-3030-R</p> <p>(1) Packing Type</p> <p>(2) Package Type</p> <p>(3) Green Package</p>	<p>(1) R: Tape Reel</p> <p>(2) K10-3030: DFN-10(3×3)</p> <p>(3) G: Halogen Free and Lead Free</p>
--	---

## MARKING




## PIN CONFIGURATION

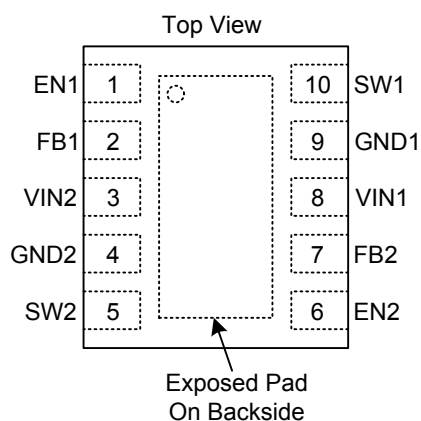

## PIN DESCRIPTION

PIN NO.	PIN NAME	DESCRIPTION
1	EN1	Channel 1 Regulator Enable Control Input Pin. Drive EN1 above 1.5V to turn on channel1. Drive EN1 below 0.3V to turn it off (shutdown current < 0.1uA).
2	FB1	Channel 1 Voltage Feedback Pin
3	VIN2	Channel 2 Supply Pin
4	GND2	Channel 2 Ground Pin
5	SW2	Channel 2 Power Switch Output
6	EN2	Channel 2 Regulator Enable Control Input Pin. Drive EN2 above 1.5V to turn on channel2. Drive EN2 below 0.3V to turn it off (shutdown current < 0.1uA).
7	FB2	Channel 2 Voltage Feedback Pin
8	VIN1	Channel 1 Supply Pin
9	GND1	Channel 1 Ground Pin
10	SW1	Channel 1 Power Switch Output

## ■ BLOCK DIAGRAM

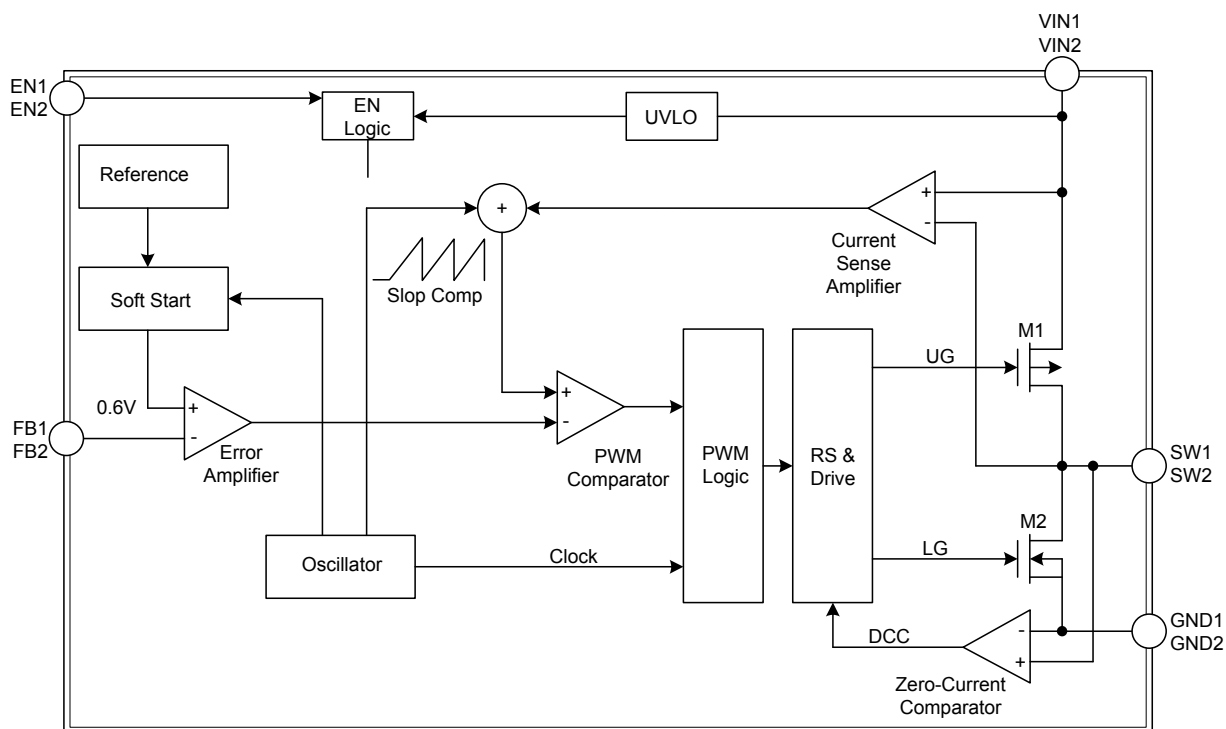

### ■ ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATINGS	UNIT
Input Supply Voltage	$V_{IN}$	GND-0.3 ~ +6.5	V
SW Voltage		-0.3 ~ $V_{IN} + 0.3$	V
ENB, $V_{FB}$ Voltage		-0.3 ~ $V_{IN}$	V
SW Peak Current		1.5	A
Junction Temperature	$T_J$	125	°C
Operating Temperature	$T_{OPR}$	-20 ~ +85	°C
Storage Temperature Range	$T_{STG}$	-65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

The IC has a protection circuit against static electricity. Do not apply high static electricity or high voltage that exceeds the performance of the protection circuit to the IC.

### ■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction ambient	$\theta_{JA}$	72	°C/W

Note: The PCB area is 4 times larger than that of IC's

### ■ ELECTRICAL CHARACTERISTICS

(Recommended Operating Conditions, unless otherwise specified;  $V_{IN}=3.6V$ ,  $T_A=0 \sim 70^\circ C$  (typical= $25^\circ C$ ))


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	$V_{IN}$		2.5		5.5	V
Feedback Current	$I_{VFB}$		-30	0.5	30	nA
Regulated Feedback Voltage	$V_{FB}$	$T_A=25^\circ C$	0.588	0.6	0.612	V
		$-40^\circ C \leq T_A \leq 85^\circ C$	0.582	0.6	0.618	V
Reference Voltage Line Regulation	$\Delta V_{FB}$	$V_{IN}=2.5V \sim 5.5V$		0.04	0.4	%V
Output Voltage Line Regulation	$\Delta V_{OUT}$	$V_{IN}=2.5V \sim 5.5V$		0.04	0.4	%V
Output Voltage Load Regulation	$V_{LOADRGE}$			0.5		%
Shutdown Current	$I_S$	$V_{EN}=0V$ , $V_{IN}=5.5V$		0.01	1	$\mu A$
SW Leakage Current	$I_{LEAK}$	$V_{EN}=0V$ , $V_{IN}=5.5V$ , $V_{SW}=0V$ or $5.5V$	-1		1	$\mu A$
PMOSFET On Resistance	$R_{DS(ON)P}$	$I_{SW}=100mA$		0.35		$\Omega$
NMOSFET On Resistance	$R_{DS(ON)N}$	$I_{SW}=100mA$		0.24		$\Omega$
PMOSFET Current Limit	$I_{PCL}$	Duty Cycle=100% Current Pulse Width<1ms	0.9	1.2	1.4	A
Oscillator Frequency	$f_{OSC}$		1.2	1.6	2.0	MHz
Thermal Shutdown Threshold	$T_S$			145		°C
EN High Level Input Voltage	$V_{EN}$	$-40^\circ C \leq T_A \leq +85^\circ C$	0.9			V
EN Low Level Input Voltage	$V_{EN}$	$-40^\circ C \leq T_A \leq +85^\circ C$			0.3	V
EN Input Current	$I_{EN}$	$V_{EN}=0V \sim V_{IN}$	-1		1	$\mu A$

## ■ TYPICAL APPLICATION CIRCUIT

### Adjustable Output Voltage

A resistive divider adjusts the output voltage of the UTC **UC3656**, which divides a 0.6V reference voltage at FB pin. The output voltage can be obtained by the equation as follows:

$$V_{OUT} = 0.6V \times \left(1 + \frac{R_2}{R_1}\right)$$

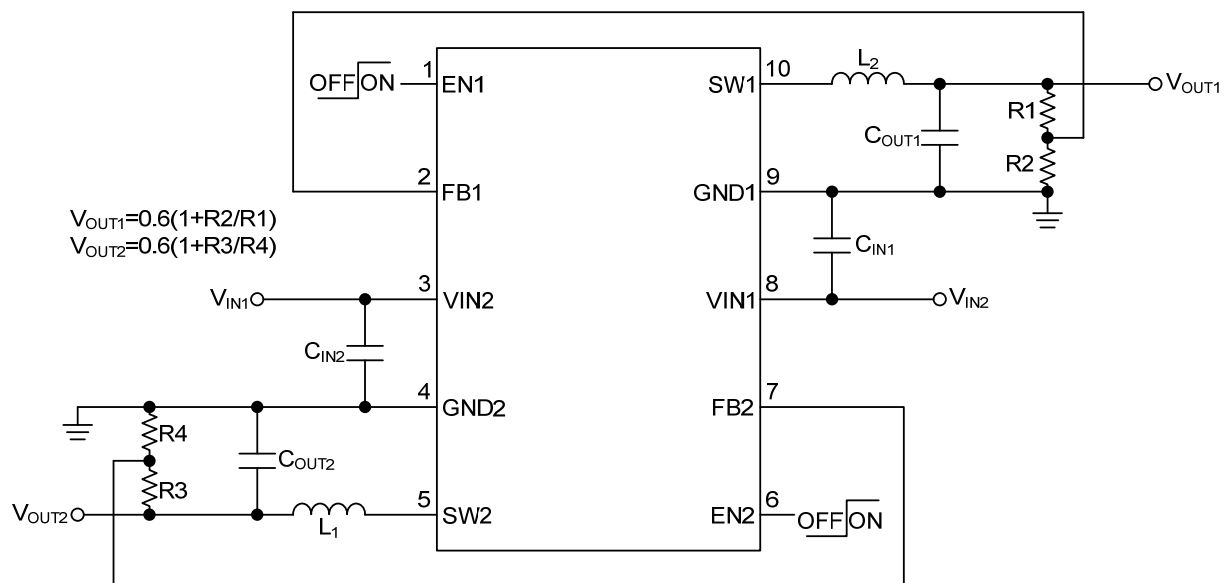

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.