

## LD2117/A

## LINEAR INTEGRATED CIRCUIT

LOW DROP FIXED AND  
ADJUSTABLE POSITIVE  
VOLTAGE REGULATORS

## ■ DESCRIPTION

The UTC LD2117/A is a low dropout, 3-terminal positive voltage regulator designed to provide output current up to 800mA/1A, There are adjustable versions ( $V_{REF}=1.25V$ ) and various fixed versions.

## ■ FEATURES

- \* Low dropout voltage
- \* Suitable for SCSI-2 active termination if  $V_{OUT}$  set to 2.85V
- \* Output current up to 0.8A for 2117 and 1.0A for 2117A
- \* Built-in current limit and over temperature protection
- \* Available in  $\pm 1\%$ (at  $25^{\circ}\text{C}$ ) and 2% in all temperature range
- \* Ultra low current consumption (0.35mA typ.)
- \* Ultra low Adjustment Current (7 $\mu\text{A}$  typ.)
- \* Ultra low minimum Load (0.3mA typ.)
- \* Stable with low ESR ceramic output capacitor (MLCC)

## ■ ORDERING INFORMATION

Ordering Number		Package	② Pin Assignment	Packing
Lead Free	Halogen Free			
-	LD2117①G-xx-AA3-②-R	SOT-223	A: AOI B: OAI C: AIO D: IAO	Tape Reel
LD2117①L-xx-TN3-②-R	LD2117①G-xx-TN3-②-R			

Notes: 1. ① : Current code: Blank: 800mA A: 1A

2. Pin Assignment: I:  $V_{IN}$  O:  $V_{OUT}$  A: ADJ


3. xx: Output Voltage, Refer to Marking Information.

 LD2117①G-xx-AA3-②-R	(1) Packing Type (2) Pin Assignment (3) Package Type (4) Output Voltage Code (5) Green Package (6) Current Code	(1) R: Tape Reel (2) refer to Pin Assignment (3) AA3: SOT-223, TN3: TO-252 (4) xx: refer to Marking Information (5) G: Halogen Free and Lead Free, L: Lead Free (6) Blank: 800mA, A: 1A
-------------------------	--	--

## ■ MARKING INFORMATION

PACKAGE	VOLTAGE CODE	MARKING
SOT-223	12 :1.2V 15 :1.5V 18 :1.8V 30 :3.0V 33 :3.3V 36 :3.6V 50 :5.0V AD :ADJ	<p>Current Code ← LD2117□G</p> <p>Voltage Code ← □□□□□□□□</p> <p>1      2      3 → Pin Code      Date Code</p>
TO-252		<p>Current Code ← UTC</p> <p>Pin Code ← LD2117□□</p> <p>Voltage Code ← □□□□□□□□</p> <p>L: Lead Free      G: Halogen Free</p> <p>Lot Code      Date Code</p>

## ■ BLOCK DIAGRAM

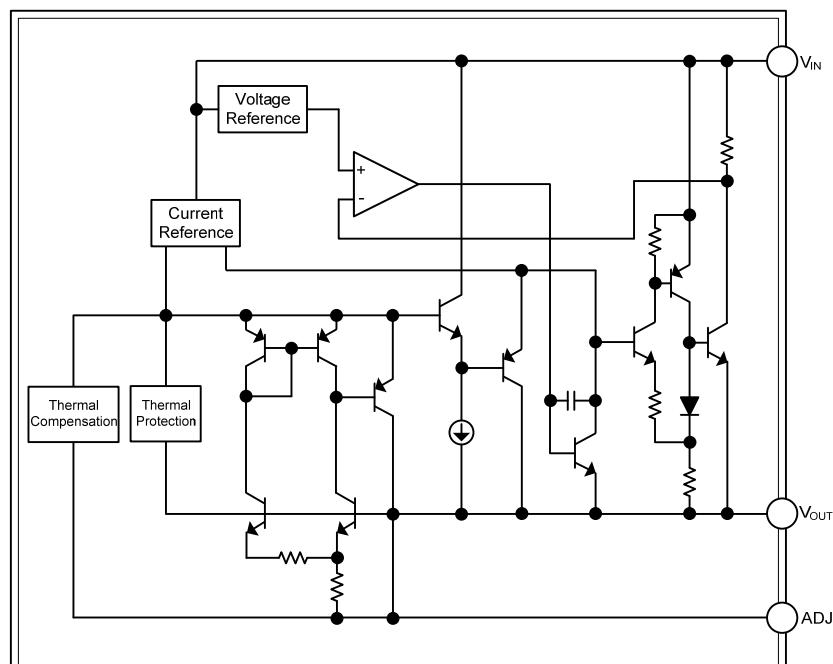

■ ABSOLUTE MAXIMUM RATING ( $T_A=25^\circ\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
DC Input Voltage	$V_{IN}$	18	V
Power Dissipation	$P_D$	Internally limited	W
Junction Temperature	$T_J$	+150	$^\circ\text{C}$
Storage temperature	$T_{STG}$	-65 ~ +150	$^\circ\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	$V_{IN}$	15	V
Operating Junction Temperature	$T_J$	0 ~ +125	$^\circ\text{C}$

■ THERMAL RESISTANCES CHARACTERISTICS

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	SOT-223	$\theta_{JA}$	165
	TO-252		112
Junction to Case	SOT-223	$\theta_{JC}$	15
	TO-252		12

■ ELECTRICAL CHARACTERISTICS

( $T_A=25^\circ\text{C}$ , refer to the test circuits,  $T_J=0 \sim 125^\circ\text{C}$ ,  $C_0=10\mu\text{F}$  unless otherwise specified)

For LD2117/A-1.2

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	$V_{OUT}$	$V_{IN}=3.2\text{V}$ , $I_{OUT}=10\text{mA}$ , $T_J=25^\circ\text{C}$	1.176	1.200	1.224	V
Output Voltage	$V_{OUT}$	$V_{IN}=2.7 \sim 8\text{V}$ LD2117 : $I_{OUT}=10 \sim 800\text{mA}$ LD2117A : $I_{OUT}=10 \sim 1000\text{mA}$	1.176	1.200	1.224	V
Line Regulation	$\Delta V_{OUT}$	$V_{IN}=2.7 \sim 8\text{V}$ , $I_{OUT}=10\text{mA}$		1	6	mV
Load Regulation	$\Delta V_{OUT}$	$V_{IN}=2.7\text{V}$ LD2117 : $I_{OUT}=10 \sim 800\text{mA}$ LD2117A : $I_{OUT}=10 \sim 1000\text{mA}$		1	10	mV
Temperature stability	$\Delta V_{OUT}$			0.5		%
Long Term Stability	$\Delta V_{OUT}$	1000 hrs, $T_J=125^\circ\text{C}$		0.3		%
Operating Input Voltage	$V_{IN}$	$I_{OUT}=100\text{mA}$			15	V
Quiescent Current	$I_Q$	$V_{IN} \leq 10\text{V}$		0.35	0.5	mA
Current Limit	$I_{LIMIT}$	$V_{IN}=6.2\text{V}$ , $T_J=25^\circ\text{C}$	LD2117 LD2117A	800 1000		mA
Output Noise Voltage	$e_N$	$B=10\text{Hz} \sim 10\text{KHz}$ , $T_J=25^\circ\text{C}$		100		$\mu\text{V}$
Supply Voltage Rejection	SVR	$I_{OUT}=40\text{mA}$ , $f=120\text{Hz}$ , $T_J=25^\circ\text{C}$ , $V_{IN}=4.2\text{V}$ , $V_{RIPPLE}=1\text{V}_{PP}$	75			dB
Dropout Voltage	$V_D$	$I_{OUT}=100\text{mA}$		1.05	1.15	V
		$I_{OUT}=500\text{mA}$		1.15	1.25	
		$I_{OUT}=800\text{mA}$		1.18	1.28	
		$I_{OUT}=1\text{A}$		1.22	1.35	
Thermal Regulation		$T_A=25^\circ\text{C}$ , 30ms Pulse		0.01	0.10	%/W
Thermal Shutdown	OTP			150		$^\circ\text{C}$

## ■ ELECTRICAL CHARACTERISTICS(Cont.)

## For LD2117/A-1.5

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V <sub>OUT</sub>	V <sub>IN</sub> =3.5V, I <sub>OUT</sub> =10mA, T <sub>J</sub> =25°C	1.470	1.500	1.530	V
Output Voltage	V <sub>OUT</sub>	V <sub>IN</sub> =3 ~ 8V LD2117 : I <sub>OUT</sub> =0~800mA LD2117A : I <sub>OUT</sub> =0~1000mA	1.470	1.500	1.530	V
Line Regulation	ΔV <sub>OUT</sub>	V <sub>IN</sub> =3 ~ 8V, I <sub>OUT</sub> =0mA		1	6	mV
Load Regulation	ΔV <sub>OUT</sub>	V <sub>IN</sub> =3V LD2117 : I <sub>OUT</sub> =0~800mA LD2117A : I <sub>OUT</sub> =0~1000mA		1	10	mV
Temperature stability	ΔV <sub>OUT</sub>			0.5		%
Long Term Stability	ΔV <sub>OUT</sub>	1000 hrs, T <sub>J</sub> =125°C		0.3		%
Operating Input Voltage	V <sub>IN</sub>	I <sub>OUT</sub> =100mA			15	V
Quiescent Current	I <sub>Q</sub>	V <sub>IN</sub> ≤10V		0.35	0.5	mA
Current Limit	I <sub>LIMIT</sub>	V <sub>IN</sub> =6.5V, T <sub>J</sub> =25°C	LD2117 LD2117A	800 1000		mA
Output Noise Voltage	e <sub>N</sub>	B=10Hz ~ 10KHz, T <sub>J</sub> =25°C		100		μV
Supply Voltage Rejection	SVR	I <sub>OUT</sub> =40mA, f=120Hz, T <sub>J</sub> =25°C, V <sub>IN</sub> =4.5V, V <sub>RIPPLE</sub> =1V <sub>PP</sub>	75			dB
Dropout Voltage	V <sub>D</sub>	I <sub>OUT</sub> =100mA I <sub>OUT</sub> =500mA I <sub>OUT</sub> =800mA I <sub>OUT</sub> =1A		1.05 1.15 1.18 1.22	1.15 1.25 1.28 1.35	V
Thermal Regulation		T <sub>A</sub> =25°C, 30ms Pulse		0.01	0.10	%/W
Thermal Shutdown	OTP			150		°C

## For LD2117/A-1.8

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Output Voltage	V <sub>OUT</sub>	V <sub>IN</sub> =3.8V, I <sub>OUT</sub> =10mA, T <sub>J</sub> =25°C	1.764	1.800	1.836	V
Output Voltage	V <sub>OUT</sub>	V <sub>IN</sub> =3.3 ~ 8V LD2117 : I <sub>OUT</sub> =0~800mA LD2117A : I <sub>OUT</sub> =0~1000mA	1.764	1.800	1.836	V
Line Regulation	ΔV <sub>OUT</sub>	V <sub>IN</sub> =3.3 ~ 8V, I <sub>OUT</sub> =0mA		1	6	mV
Load Regulation	ΔV <sub>OUT</sub>	V <sub>IN</sub> =3.3V LD2117 : I <sub>OUT</sub> =0~800mA LD2117A : I <sub>OUT</sub> =0~1000mA		1	10	mV
Temperature stability	ΔV <sub>OUT</sub>			0.5		%
Long Term Stability	ΔV <sub>OUT</sub>	1000 hrs, T <sub>J</sub> =125°C		0.3		%
Operating Input Voltage	V <sub>IN</sub>	I <sub>OUT</sub> =100mA			15	V
Quiescent Current	I <sub>Q</sub>	V <sub>IN</sub> ≤10V		0.35	0.5	mA
Current Limit	I <sub>LIMIT</sub>	V <sub>IN</sub> =6.8V, T <sub>J</sub> =25°C	LD2117 LD2117A	800 1000		mA
Output Noise Voltage	e <sub>N</sub>	B=10Hz ~ 10KHz, T <sub>J</sub> =25°C		100		μV
Supply Voltage Rejection	SVR	I <sub>OUT</sub> =40mA, f=120Hz, T <sub>J</sub> =25°C, V <sub>IN</sub> =5.5V, V <sub>RIPPLE</sub> =1V <sub>PP</sub>	75			dB
Dropout Voltage	V <sub>D</sub>	I <sub>OUT</sub> =100mA I <sub>OUT</sub> =500mA I <sub>OUT</sub> =800mA I <sub>OUT</sub> =1A		1.05 1.15 1.18 1.22	1.15 1.25 1.28 1.35	V
Thermal Regulation		T <sub>A</sub> =25°C, 30ms Pulse		0.01	0.10	%/W
Thermal Shutdown	OTP			150		°C

# LD2117/A

## LINEAR INTEGRATED CIRCUIT

### ELECTRICAL CHARACTERISTICS(Cont.)

#### For LD2117/A-3.0

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V <sub>OUT</sub>	V <sub>IN</sub> =5V, I <sub>OUT</sub> =10mA, T <sub>J</sub> =25°C	2.940	3.000	3.060	V
Output Voltage	V <sub>OUT</sub>	V <sub>IN</sub> =4.5 ~ 10V LD2117 : I <sub>OUT</sub> =0~800mA LD2117A : I <sub>OUT</sub> =0~1000mA	2.940	3.000	3.060	V
Line Regulation	ΔV <sub>OUT</sub>	V <sub>IN</sub> =4.5 ~ 12V, I <sub>OUT</sub> =0mA		1	6	mV
Load Regulation	ΔV <sub>OUT</sub>	V <sub>IN</sub> =4.5V LD2117 : I <sub>OUT</sub> =0~800mA LD2117A : I <sub>OUT</sub> =0~1000mA		1	10	mV
Temperature stability	ΔV <sub>OUT</sub>			0.5		%
Long Term Stability	ΔV <sub>OUT</sub>	1000 hrs, T <sub>J</sub> =125°C		0.3		%
Operating Input Voltage	V <sub>IN</sub>	I <sub>OUT</sub> =100mA			15	V
Quiescent Current	I <sub>Q</sub>	V <sub>IN</sub> ≤15V		0.35	0.5	mA
Current Limit	I <sub>LIMIT</sub>	V <sub>IN</sub> =8V, T <sub>J</sub> =25°C	LD2117 LD2117A	800 1000		mA
Output Noise Voltage	e <sub>N</sub>	B=10Hz ~ 10KHz, T <sub>J</sub> =25°C		100		μV
Supply Voltage Rejection	SVR	I <sub>OUT</sub> =40mA, f=120Hz, T <sub>J</sub> =25°C, V <sub>IN</sub> =6V, V <sub>RIPPLE</sub> =1V <sub>PP</sub>	75			dB
Dropout Voltage	V <sub>D</sub>	I <sub>OUT</sub> =100mA I <sub>OUT</sub> =500mA I <sub>OUT</sub> =800mA I <sub>OUT</sub> =1A		1.05 1.15 1.18 1.22	1.15 1.25 1.28 1.35	V
Thermal Regulation		T <sub>A</sub> =25°C, 30ms Pulse		0.01	0.10	%/W
Thermal Shutdown	OTP			150		°C

#### For LD2117/A-3.3

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V <sub>OUT</sub>	V <sub>IN</sub> =5.3V, I <sub>OUT</sub> =10mA, T <sub>J</sub> =25°C	3.234	3.300	3.366	V
Output Voltage	V <sub>OUT</sub>	V <sub>IN</sub> =4.75 ~ 10V LD2117 : I <sub>OUT</sub> =0~800mA LD2117A : I <sub>OUT</sub> =0~1000mA	3.234	3.300	3.366	V
Line Regulation	ΔV <sub>OUT</sub>	V <sub>IN</sub> =4.75 ~ 15V, I <sub>OUT</sub> =0mA		1	6	mV
Load Regulation	ΔV <sub>OUT</sub>	V <sub>IN</sub> =4.75V LD2117 : I <sub>OUT</sub> =0~800mA LD2117A : I <sub>OUT</sub> =0~1000mA		1	10	mV
Temperature stability	ΔV <sub>OUT</sub>			0.5		%
Long Term Stability	ΔV <sub>OUT</sub>	1000 hrs, T <sub>J</sub> =125°C		0.3		%
Operating Input Voltage	V <sub>IN</sub>	I <sub>OUT</sub> =100mA			15	V
Quiescent Current	I <sub>Q</sub>	V <sub>IN</sub> ≤15V		0.35	0.5	mA
Current Limit	I <sub>LIMIT</sub>	V <sub>IN</sub> =8.3V, T <sub>J</sub> =25°C	LD2117 LD2117A	800 1000		mA
Output Noise Voltage	e <sub>N</sub>	B=10Hz ~ 10KHz, T <sub>J</sub> =25°C		100		μV
Supply Voltage Rejection	SVR	I <sub>OUT</sub> =40mA, f=120Hz, T <sub>J</sub> =25°C, V <sub>IN</sub> =6.3V, V <sub>RIPPLE</sub> =1V <sub>PP</sub>	75			dB
Dropout Voltage	V <sub>D</sub>	I <sub>OUT</sub> =100mA I <sub>OUT</sub> =500mA I <sub>OUT</sub> =800mA I <sub>OUT</sub> =1A		1.05 1.15 1.18 1.22	1.15 1.25 1.28 1.35	V
Thermal Regulation		T <sub>A</sub> =25°C, 30ms Pulse		0.01	0.10	%/W
Thermal Shutdown	OTP			150		°C

# LD2117/A

## LINEAR INTEGRATED CIRCUIT

### ELECTRICAL CHARACTERISTICS(Cont.)

#### For LD2117/A-3.6

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V <sub>OUT</sub>	V <sub>IN</sub> =5.6V, I <sub>OUT</sub> =10mA, T <sub>J</sub> =25°C	3.528	3.600	3.672	V
Output Voltage	V <sub>OUT</sub>	V <sub>IN</sub> =5 ~ 10V LD2117 : I <sub>OUT</sub> =0~800mA LD2117A : I <sub>OUT</sub> =0~1000mA	3.528	3.600	3.672	V
Line Regulation	ΔV <sub>OUT</sub>	V <sub>IN</sub> =5 ~ 15V, I <sub>OUT</sub> =0mA		1	6	mV
Load Regulation	ΔV <sub>OUT</sub>	V <sub>IN</sub> =5V LD2117 : I <sub>OUT</sub> =0~800mA LD2117A : I <sub>OUT</sub> =0~1000mA		1	10	mV
Temperature stability	ΔV <sub>OUT</sub>			0.5		%
Long Term Stability	ΔV <sub>OUT</sub>	1000 hrs, T <sub>J</sub> =125°C		0.3		%
Operating Input Voltage	V <sub>IN</sub>	I <sub>OUT</sub> =100mA			15	V
Quiescent Current	I <sub>Q</sub>	V <sub>IN</sub> ≤15V		0.35	0.5	mA
Current Limit	I <sub>LIMIT</sub>	V <sub>IN</sub> =8.6V, T <sub>J</sub> =25°C	LD2117 LD2117A	800 1000		mA
Output Noise Voltage	e <sub>N</sub>	B=10Hz to 10KHz, T <sub>J</sub> =25°C		100		μV
Supply Voltage Rejection	SVR	I <sub>OUT</sub> =40mA, f=120Hz, T <sub>J</sub> =25°C, V <sub>IN</sub> =6.6V, V <sub>RIPPLE</sub> =1V <sub>PP</sub>	75			dB
Dropout Voltage	V <sub>D</sub>	I <sub>OUT</sub> =100mA I <sub>OUT</sub> =500mA I <sub>OUT</sub> =800mA I <sub>OUT</sub> =1A		1.05 1.15 1.18 1.22	1.15 1.25 1.28 1.35	V
Thermal Regulation		T <sub>A</sub> =25°C, 30ms Pulse		0.01	0.10	%/W
Thermal Shutdown	OTP			150		°C

#### For LD2117/A-5.0

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V <sub>OUT</sub>	V <sub>IN</sub> =7V, I <sub>OUT</sub> =10mA, T <sub>J</sub> =25°C	4.9	5.000	5.1	V
Output Voltage	V <sub>OUT</sub>	V <sub>IN</sub> =6.5 ~ 15V LD2117 : I <sub>OUT</sub> =0~800mA LD2117A : I <sub>OUT</sub> =0~1.0A	4.9	5.000	5.1	V
Line Regulation	ΔV <sub>OUT</sub>	V <sub>IN</sub> =6.5 ~ 15V, I <sub>OUT</sub> =0mA		1	6	mV
Load Regulation	ΔV <sub>OUT</sub>	V <sub>IN</sub> =6.5V LD2117 : I <sub>OUT</sub> =0~800mA LD2117A : I <sub>OUT</sub> =0~1000mA		1	15	mV
Temperature stability	ΔV <sub>OUT</sub>			0.5		%
Long Term Stability	ΔV <sub>OUT</sub>	1000 hrs, T <sub>J</sub> =125°C		0.3		%
Operating Input Voltage	V <sub>IN</sub>	I <sub>OUT</sub> =100mA			15	V
Quiescent Current	I <sub>Q</sub>	V <sub>IN</sub> ≤15V		0.35	0.5	mA
Current Limit	I <sub>LIMIT</sub>	V <sub>IN</sub> =10V, T <sub>J</sub> =25°C	LD2117 LD2117A	800 1000		mA
Output Noise Voltage	e <sub>N</sub>	B=10Hz to 10KHz, T <sub>J</sub> =25°C		100		μV
Supply Voltage Rejection	SVR	I <sub>OUT</sub> =40mA, f=120Hz, T <sub>J</sub> =25°C, V <sub>IN</sub> =8V, V <sub>RIPPLE</sub> =1V <sub>PP</sub>	75			dB
Dropout Voltage	V <sub>D</sub>	I <sub>OUT</sub> =100mA I <sub>OUT</sub> =500mA I <sub>OUT</sub> =800mA I <sub>OUT</sub> =1A		1.05 1.15 1.18 1.22	1.15 1.25 1.28 1.35	V
Thermal Regulation		T <sub>A</sub> =25°C, 30ms Pulse		0.01	0.10	%/W
Thermal Shutdown	OTP			150		°C

## ■ ELECTRICAL CHARACTERISTICS(Cont.)

For LD2117/A-ADJ

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Reference Voltage	$V_{REF}$	$V_{IN}-V_{OUT}=2V$ , $I_{OUT}=10mA$ , $T_J=25^\circ C$	1.225	1.25	1.275	V
Reference Voltage	$V_{REF}$	$V_{IN}-V_{OUT}=1.4\sim10V$ LD2117A : $I_{OUT}=10\sim1000mA$	1.225	1.25	1.275	V
Line Regulation	$\Delta V_{OUT}$	$V_{IN}-V_{OUT}=1.5 \sim 13.75V$ , $I_{OUT}=10mA$		0.035	0.2	%
Load Regulation	$\Delta V_{OUT}$	$V_{IN}-V_{OUT}=3V$ LD2117 : $I_{OUT}=10\sim800mA$ LD2117A : $I_{OUT}=10\sim1000mA$		0.1	0.5	%
Temperature stability	$\Delta V_{OUT}$			0.50		%
Long Term Stability	$\Delta V_{OUT}$	1000 hrs, $T_J=125^\circ C$		0.3		%
Operating Input Voltage	$V_{IN}$				15	V
Adjustment Pin Current	$I_{ADJ}$	$V_{IN}\leq15V$		7	10	$\mu A$
Adjustment Pin Current Change	$\Delta I_{ADJ}$	$V_{IN}-V_{OUT}=1.4\sim10V$ , LD2117A : $I_{OUT}=10 \sim 1000mA$		0.3	2	$\mu A$
Minimum Load Current	$I_{O(MIN)}$	$V_{IN}=15V$		0.3	1	mA
Current Limit	$I_{LIMIT}$	$V_{IN}-V_{OUT}=5V$ , $T_J=25^\circ C$	LD2117 LD2117A	800 1000		mA
Output Noise (% $V_O$ )	$e_N$	$B=10Hz \sim 10KHz$ , $T_J=25^\circ C$		0.003		%
Supply Voltage Rejection	SVR	$I_{OUT}=40mA$ , $f=120Hz$ , $T_J=25^\circ C$ , $V_{IN}-V_{OUT}=3V$ , $V_{RIPPLE}=1V_{PP}$	75			dB
Dropout Voltage	$V_D$	$I_{OUT}=100mA$ $I_{OUT}=500mA$ $I_{OUT}=800mA$ $I_{OUT}=1A$		1.05 1.15 1.18 1.22	1.15 1.25 1.28 1.35	V
Thermal Regulation		$T_A=25^\circ C$ , 30ms Pulse		0.01	0.10	%/W
Thermal Shutdown	OTP			150		°C

■ APPLICATION NOTE of LD2117/A ADJUSTABLE

The **LD2117/A** adjustable has a reference voltage of between the OUT and ADJ pins.  $I_{ADJ}$  is 7 $\mu$ A typ. (10 $\mu$ A max.) and  $\Delta I_{ADJ}$  is 0.3 $\mu$ A typ. (2 $\mu$ A max.).

$R_1$  is normally fixed to 1.2k $\Omega$ .

From figure 4 we obtain:

$$V_{OUT} = V_{REF} + R_2(I_{ADJ} + I_{R1}) = V_{REF} + R_2(I_{ADJ} + V_{REF}/R_1) = V_{REF}(1 + R_2/R_1) + R_2 \times I_{ADJ}.$$

Usually  $R_2$  value is in the range of few K $\Omega$ , so the  $R_2 \times I_{ADJ}$  product could be neglected; then the above expression becomes:  $V_{OUT} = V_{REF}(1 + R_2/R_1)$

For better load regulation, realize a good Kelvin connection of  $R_1$  and  $R_2$  is important. Particularly  $R_1$  connection must be realized very close to OUT and ADJ pin, while  $R_2$  ground connection must be placed as near as possible to the negative Load pin. Ripple rejection can be improved by introducing a 10 $\mu$ F electrolytic capacitor placed in parallel to the  $R_2$  resistor (See Fig. 5)

The UTC **LD2117/A** also supports MLCC. See Fig.6 for adjustable output and Fig.7 for fixed Output

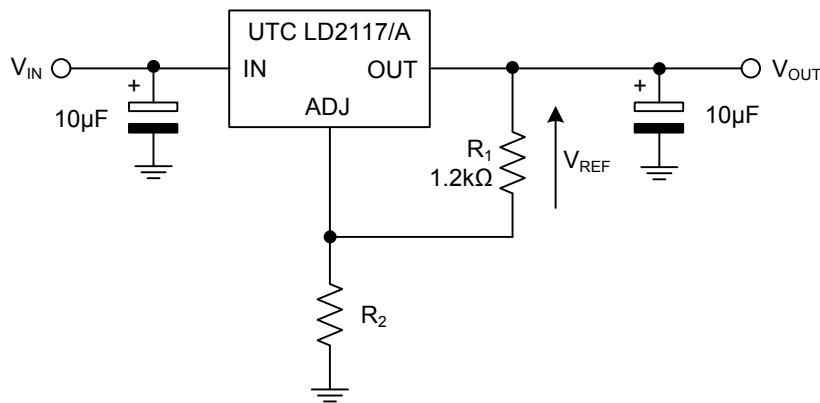


Fig.4 Adjustable Output Voltage Application Circuit

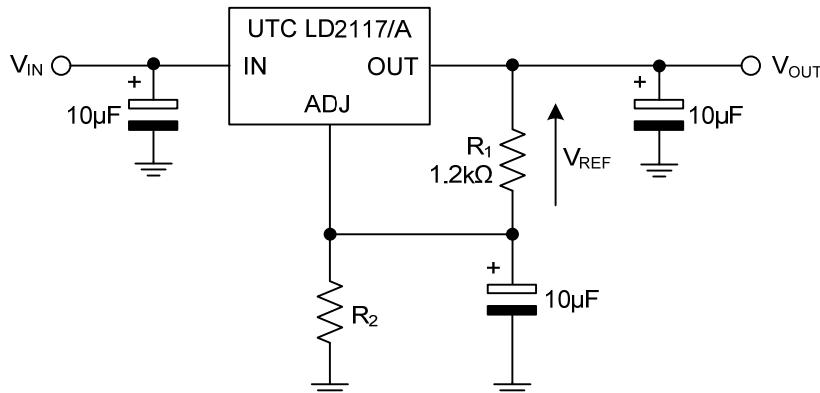


Fig.5 Adjustable Output Voltage Application with improved Ripple Rejection.

### ■ APPLICATION NOTE of LD2117/A ADJUSTABLE(Cont.)

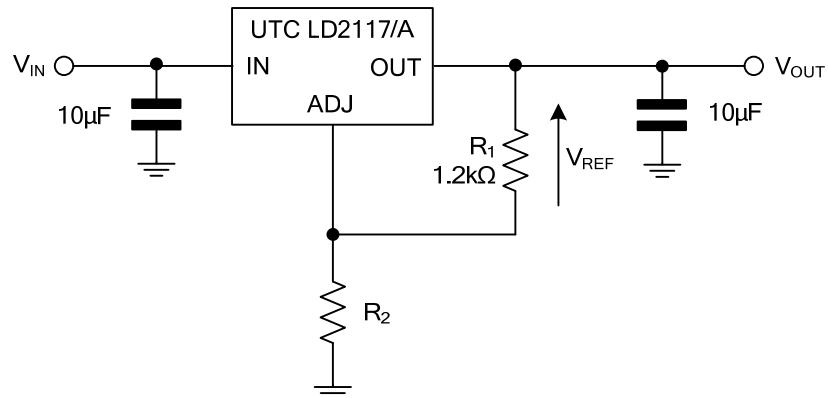


Fig.6 Adjustable Output Voltage Application Circuit for MLCC













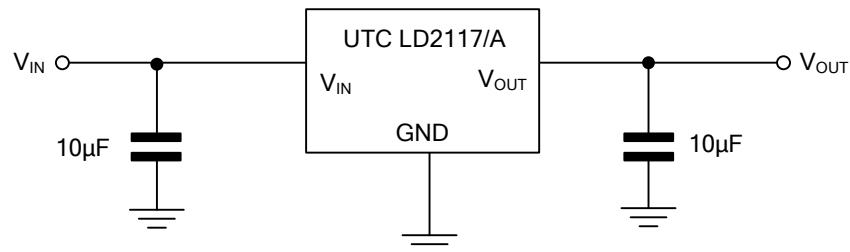


Fig.7 Fixed Output Voltage Application Circuit for MLCC

■ TYPICAL CHARACTERISTICS

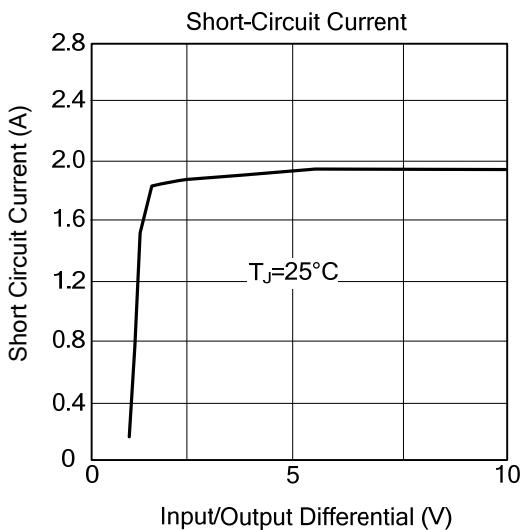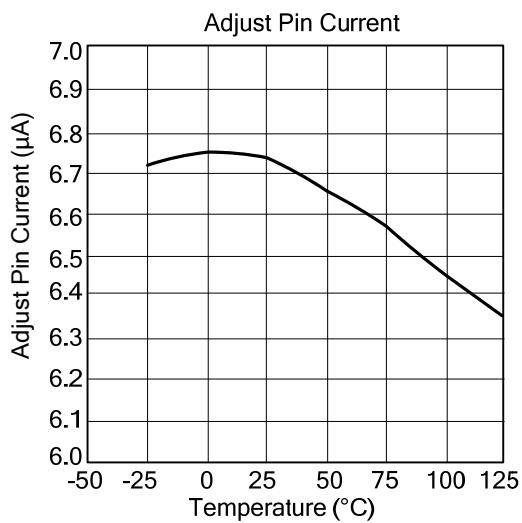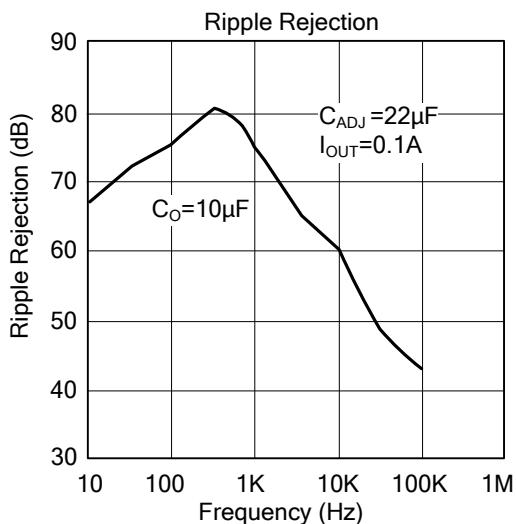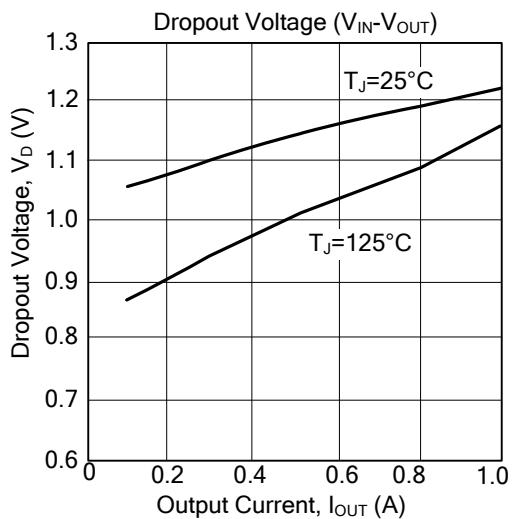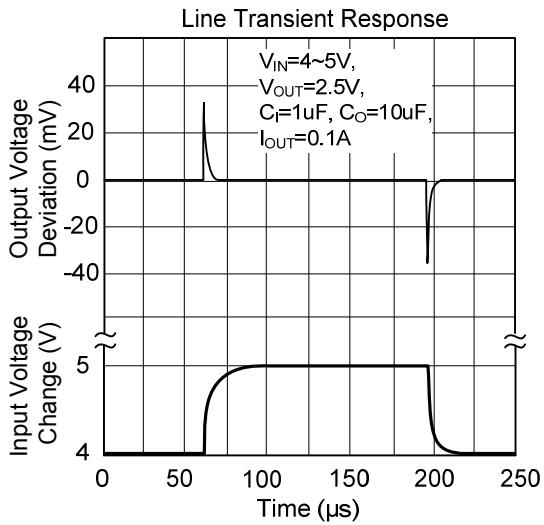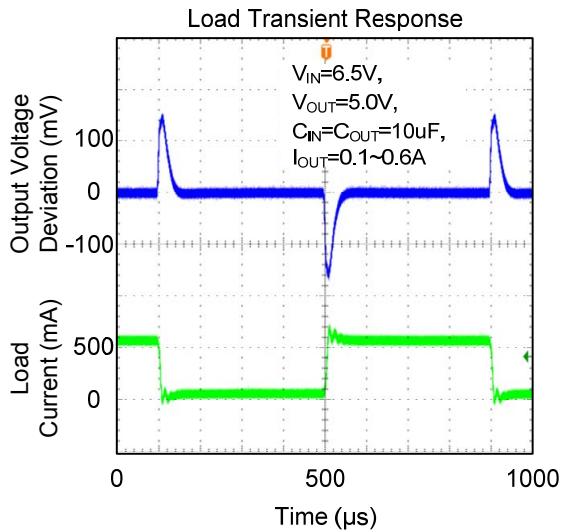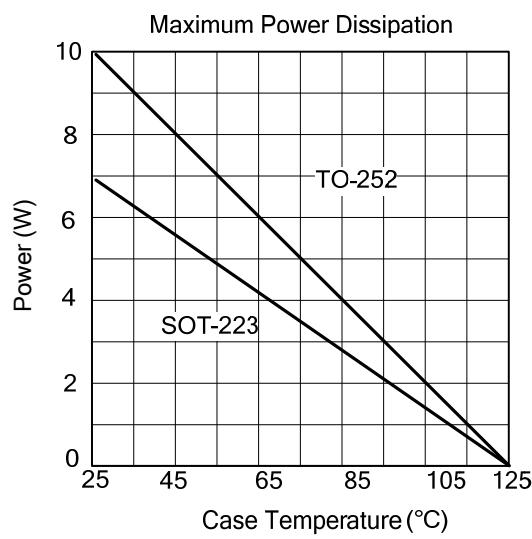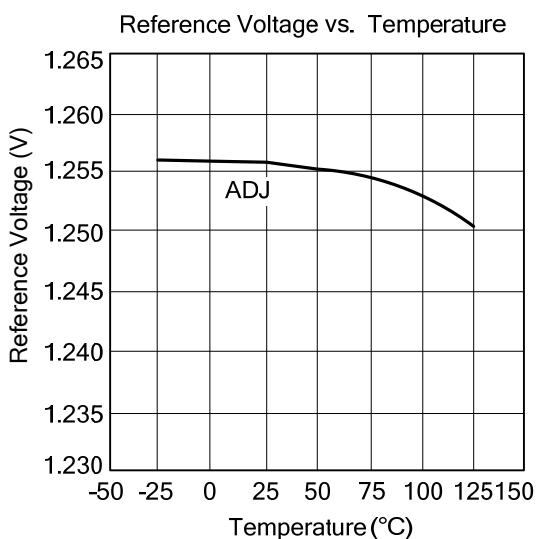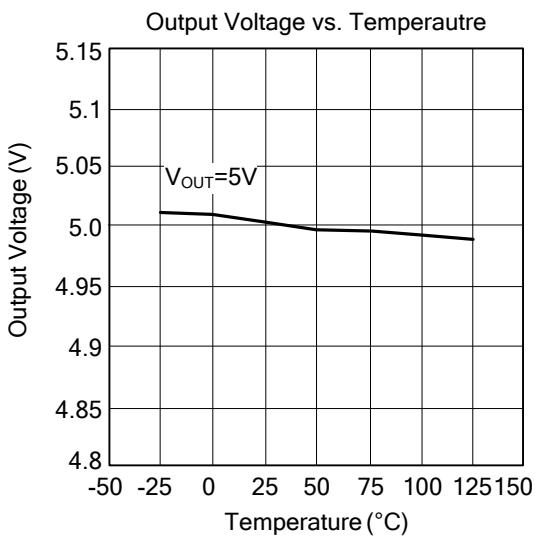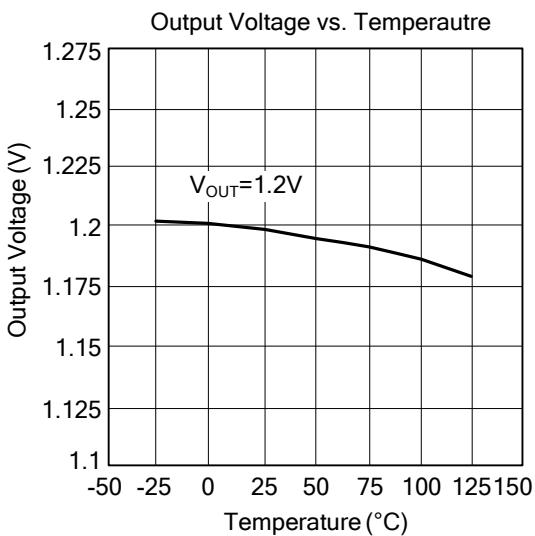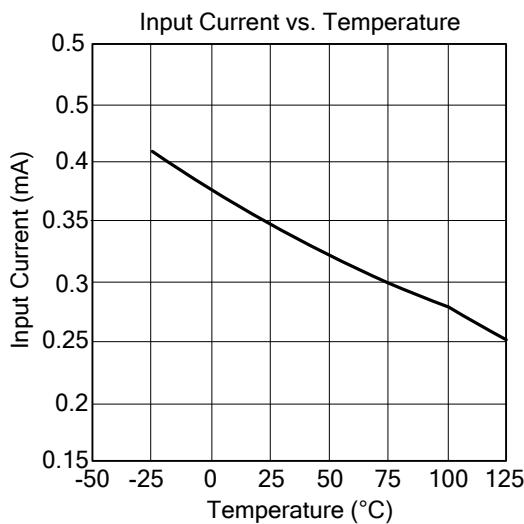

## ■ TYPICAL CHARACTERISTICS(Cont.)

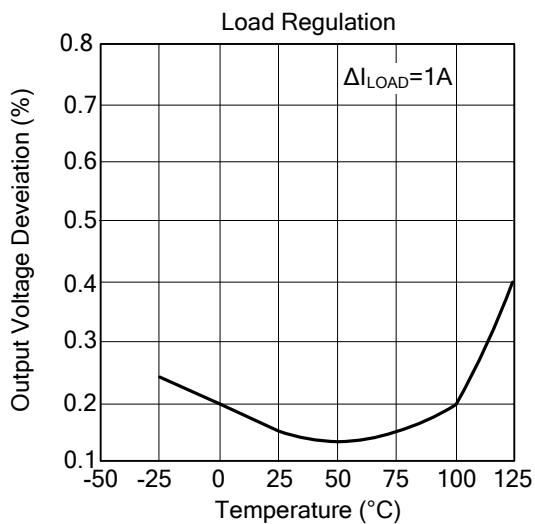

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.

