UNISONIC TECHNOLOGIES CO.,LTD.

TEA2025AH

Preliminary

LINEAR INTEGRATED CIRCUIT


STEREO AUDIO AMPLIFIER

■ DESCRIPTION

The UTC **TEA2025AH** is a monolithic integrated audio amplifier in a 16-pin plastic dual in line package. It is designed for portable cassette players and radios.


■ FEATURES

- *Working Voltage down to 3V
- *Few External components
- *High Channel isolation
- *Voltage gain up to 45dB(Adjustable with external resistor)
- *Soft clipping
- *Internal Thermal protection




■ ORDERING INFORMATION

Order N	Number	Dookogo	Packing	
Lead Free	Halogen Free	Package		
TEA2025AHL-D16-T	TEA2025AHG-D16-T	DIP-16	Tube	




MARKING




<u>www.unisonic.com.tw</u> 1 of 7

■ PIN CONFIGURATION



■ BLOCK DIAGRAM

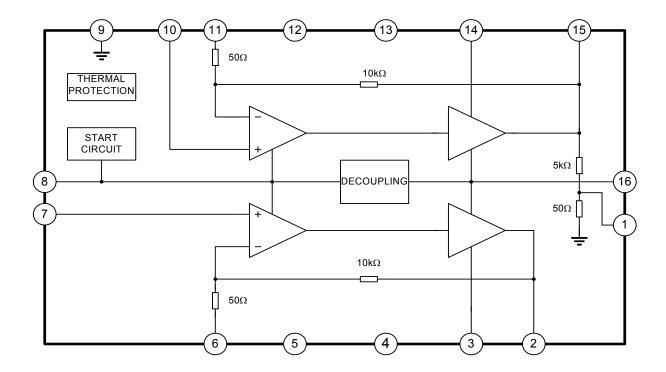

■ **ABSOLUTE MAXIMUM RATINGS** (T_A = 25°C, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V _{SS}	15	V
Peak Output Current	I _{O (peak)} 1.5		Α
Junction Temperature	TJ	150	°C
Operating Temperature	T _{OPR}	-20 ~ +85	°C
Storage Temperature	T _{STG}	-40 ~ +150	°C

- Note: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

 Absolute maximum ratings are stress ratings only and functional device operation is not implied.
 - 2. The device is guaranteed to meet performance specification within 0° C \sim 70°C operating temperature range and assured by design from -20° C \sim 85°C.

■ THERMAL CHARACTERISTICS

PARAMETER	SYMBOL	RATINGS	UNIT	
Thermal Resistance Junction to ambient	θ_{JA}	60	°C/W	
Thermal Resistance Junction to case	θ_{JC}	15	°C/W	

■ **ELECTRICAL CHARACTERISTICS** (T_A = 25°C, V_{CC}=10V, Stereo, unless otherwise specified.)

PARAMETE	:R	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Supply Voltage		V_{SS}			3		12	V
Quiescent Current		lα				40	50	mA
Quiescent Output Vo	iescent Output Voltage V _{OUT}				5.0		V	
Voltage Gain		G_V	Stereo		43	45	47	dB
			Bridge		49	51	53	
Voltage Gain Differe	nce	ΔG_V			-1		+1	dB
Input Impedance		R_{IN}				30		kΩ
	$R_L=4\Omega$	Роит	Stereo per channel f=1kHz, V _{CC} =10V	THD=10%	1.5			W
Output Power				THD=1%		1		W
	R _L =6Ω		Bridge, V _{CC} =10V	THD=10%	4.0			W
				THD=1%		2		W
Total Harmonic	Stereo	THD	V_{CC} =10V, R_L =4 Ω , f=1kHz, P_{OUT} =1W			0.5	1.0	%
Distortion	Bridge	וחט	V_{CC} =10V, R_L =6 Ω , P_{OUT} =1W			0.5		70
Supply Voltage Rejection		SVR	R _G =0,AV=45Db,V _{RIPPLE} =1 F _{RIPPLE} =100Hz		40	46		dB
						70		
Input Noise Voltage $\frac{R_G=0}{R_G=10k\Omega}$		Vn	A _V =200, Bandwidth:20Hz ~ 20kHz			1.5	3	μV
						3	6	
Cross-Talk		C.T.	R_G =10k Ω , f=1kHz, R_L =4 Ω , P_{OUT} =1W		40	55		dB

APPLICATION INFORMATION

Input Capacitor

Input capacitor is PNP type allowing source to be referenced to ground. In this way no input coupling capacitor is required. However, a series capacitor (0.22 uF)to the input side can be useful in case of noise due to variable resistor contact.

Bootstrap

The bootstrap connection allows to increase the output swing. The suggested value for the bootstrap capacitors (100uF) avoids a reduction of the output signal also at low frequencies and low supply voltages.

Voltage Gain Adjust

STEREO MODE (Figure 1)

The voltage gain is determined by on-chip resistors R1 and R2 together with the external RfC1 series connected between pin 6 (11) and ground. The frequency response is given approximated by:

$$\frac{V_{\text{OUT}}}{V_{\text{IN}}} = \frac{R_1}{R_f + R_2 + \frac{1}{\text{JWC1}}}$$

With $R_f=0$, $C_1=100\mu F$, the gain results 46 dB with pole at f=32 Hz.

THE purpose of Rf is to reduce the gain. It is recommended to not reduce it under 36 dB.

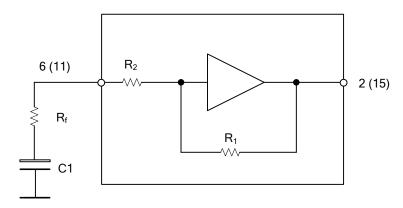


Figure 1

BRIDGE MODE (Figure 2)

The bridge configuration is realized very easily thanks to an internal voltage divider which provides (at pin 1) the CH 1 output signal after reduction. It is enough to connect pin 6 (inverting input of CH 2) with a capacitor to pin 1 and to connect to ground the pin 7.

The total gain of the bridge is given by:

$$\frac{V_{\text{OUT}}}{V_{\text{IN}}} = \frac{R_1}{R_f + R_2 + \frac{1}{JWC1}} \left(1 + \frac{R_3}{R_4} \; \frac{R_1}{R_2 + R_4 + \frac{1}{JWC1}} \; \right)$$

and with the suggested values (C1 = C2 = 100 uF, R_f = 0) means: Gv = 52 dB with first pole at f = 32 Hz

■ APPLICATION INFORMATION (Cont.)




Figure 2

Output Capacitors

The low cut off frequency due to output capacitor depending on the load is given by:

$$F_{L} = \frac{1}{2 \pi C_{OUT} \times R_{L}}$$

with C_{OUT} 470uF and R_L = 4 ohm it means F_L = 80Hz.

Pop Noise (Figure 3)

Most amplifiers similar to UTC **TEA2025AH** need external resistors between DC outputs and ground in order to optimize the pop on/off performance and crossover distortion.




Figure 3

The UTC **TEA2025AH** solution allows to save components because of such resistors (800 ohm) are included into the chip.

Stability

A good layout is recommended in order to avoid oscillations. Generally the designer must pay attention on the following points:

- Short wires of components and short connections.
- No ground loops.
- Bypass of supply voltage with capacitors as nearest as possible to the supply I. C. pin. The low value (poliester) capacitors must have good temperature and frequency characteristics.
- No sockets

The heatsink can have a smaller factor of safety compared with that of a conventional circuit. There is no device damage in the case of excessive junction temperature: all that happens is that P_O (and therefore P_{tot}) and Id are reduced.

■ TYPICAL APPLICATION CIRCUIT




Fig. 4 Bridge Application





Fig.5 Stereo Application

■ SCHEMATIC DIAGRAM

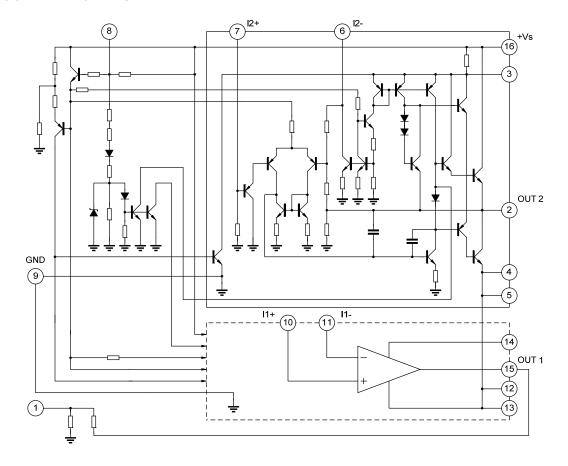

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.