




ULV1546

Preliminary

CMOS IC

20V HIGH CURRENT DRIVE RAIL-TO-RAIL VCOM/GAMMA BUFFER

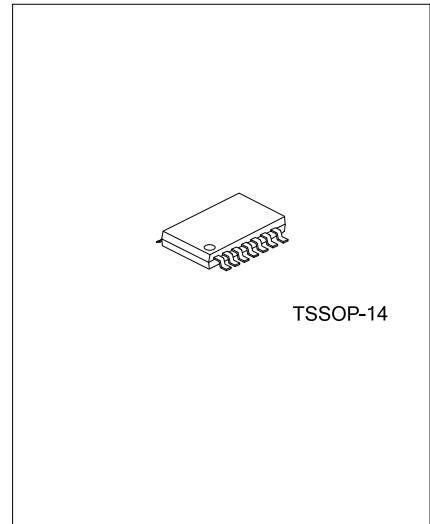

DESCRIPTION

The UTC **ULV1546** is the quadruple high voltage rail-to-rail Vcom/Gamma Buffer with low power dissipation. Operating on power supplies ranging from 5V to 20V, while current consuming is less than 1.2mA / per amplifier. Rail-to-rail output capability and common mode input ability beyond the rails enable these amplifiers to offer maximum dynamic range at any supply voltage.

Fast slew rate and settling times, and a high output drive capability of 300mA peak AC current (sink and source) are also provided by UTC **ULV1546**. With so many attractive characteristics, the four amplifiers inside UTC **ULV1546** are ideal for use as voltage reference buffers in TFT-LCD panel applications for TV, PC, Notebooks, and mobile computing devices.

FEATURES


- * Wide Supply Operation Range +5V~+20V
- * Beyond the rails input capability
- * Rail-to-rail output swing
- * Low supply current, 1.2mA per amplifier (typical)
- * Wide bandwidth (unit gain) 30MHz-3dB bandwidth
- * 300mA peak output AC current (typ.)
- * High slew rate=30V/μs
- * Unity-gain stable

ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
ULV1546L-P14-T	ULV1546G-P14-T	TSSOP-14	Tube
ULV1546L-P14-R	ULV1546G-P14-R	TSSOP-14	Tape Reel

<p>ULV1546L-P14-T</p> <p>(1) Packing Type (2) Package Type (3) Lead Free</p>	<p>(1) T: Tube, R: Tape Reel (2) P14: TSSOP-14 (3) L: Lead Free, G: Halogen Free</p>
--	--


■ PIN CONFIGURATION

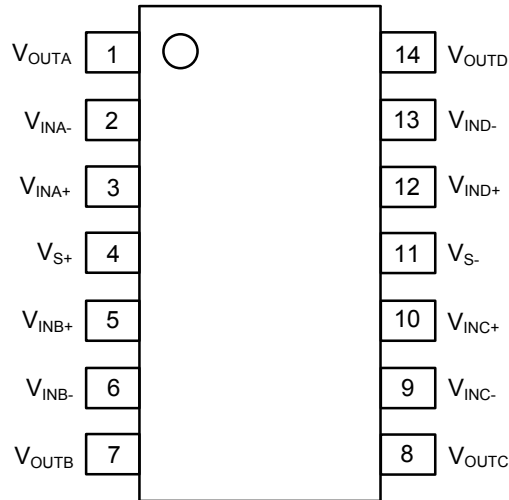

■ PIN DESCRIPTION

PIN NO.	PIN NAME	DESCRIPTION
1	V _{OUTA}	Output of amplifier-A
2	V _{INA-}	Inverting input of amplifier-A
3	V _{INA+}	Non-inverting input of amplifier-A
4	V _{S+}	Positive power supply
5	V _{INB+}	Non-inverting input of amplifier-B
6	V _{INB-}	Inverting input of amplifier-B
7	V _{OUTB}	Output of amplifier-B
8	V _{OUTC}	Output of amplifier-C
9	V _{INC-}	Inverting input of amplifier-C
10	V _{INC+}	Non-inverting input of amplifier-C
11	V _{S-}	Negative power supply
12	V _{IND+}	Non-inverting input of amplifier-D
13	V _{IND-}	Inverting input of amplifier-D
14	V _{OUTD}	Output of amplifier-D

■ BLOCK DIAGRAM

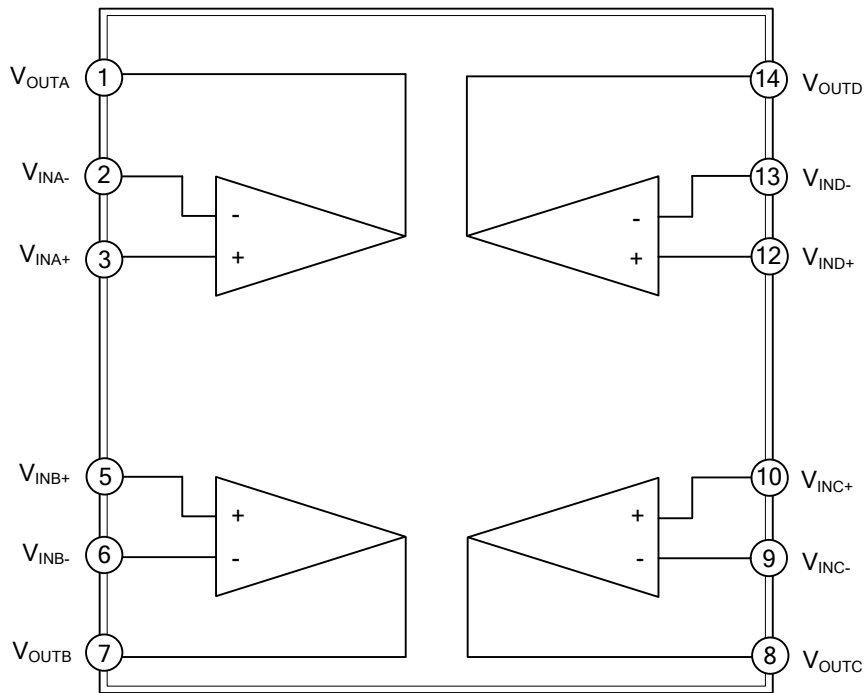

■ ABSOLUTE MAXIMUM RATING (T_A=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage Between VS+ & VS-	VS+-VS-	+21.5	V
Input Voltage	V _I	VS- -0.5, VS+ + 0.5	V
Max. Continuous Output Current	I _{OUT}	80	mA
Max. Continuous Output AC Current	I _{O(AC)}	400 (20% Duty Cycle)	mA
Junction Temperature	T _J	+150	°C
Operating Temperature	T _{OPR}	-40~+85	°C
Storage Temperature	T _{STG}	-65~+150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS

(V_{S+}=+5V, V_{S-}=-5V, with R_L=10KΩ and C_L=10pF, T_A=25°C unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Characteristics						
Input Offset Voltage	V _{OS}	V _{CM} =0V		3	15	mV
Average Offset Voltage Drift	T _{CVos}	Measured over Operating Temperature Range		5		μV/°C
Input Bias Current	I _B	V _{CM} =0V		2	50	nA
Input Impedance	R _{IN}			1		GΩ
Input Capacitance	C _{IN}			2.0		pF
Common-Mode Input Range	CMIR		-5.5		+5.5	V
Common-Mode Rejection Ratio	CMRR	-5.5V ≤ V _{IN} ≤ +5.5V	50	72		dB
Open-Loop Gain	A _{VOL}	-4.5V ≤ V _{OUT} ≤ +4.5V	65	78		dB
Output Characteristics						
Output Swing Low	V _{OL}	I _L = -5mA		-4.94	-4.88	V
Output Swing High	V _{OH}	I _L = +5mA	4.88	4.94		V
Peak Output AC Current	I _{OUT}	V _{OUT} Reaches within ±3V from Rails		±300		mA
Power Supply Performance						
Power Supply Rejection Ratio	PSRR	V _S from ±2.25V to ±7.75V	60	80		dB
Supply Current (Per Amplifier)	I _S	No Load		1.2		mA
Dynamic Performance						
Slew Rate (Rising & Falling Edges)	SR	-4.0V ≤ V _{OUT} ≤ +4.0V		27		V/μs
Settling to ±0.1% (A _V =+1)	t _s	V _O =2.0V Step @ C _L =0pF		100		ns
-3dB Bandwidth	B _W			28		MHz
Gain-Bandwidth Product	G _{BWP}			22		MHz
Phase Margin	P _M			50		°
Channel Separation	CHS	f=5MHz		90		dB

■ ELECTRICAL CHARACTERISTICS(Cont.)

($V_{S+}=+16V$, $V_{S-}=0V$, with $R_L=10K\Omega$ and $C_L=10pF$, $T_A=25^\circ C$ unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Characteristics						
Input Offset Voltage	V_{OS}	$V_{CM}=8V$		3	15	mV
Average Offset Voltage Drift	T_{CVos}	Measured over Operating Temperature Range		5		$\mu V/^\circ C$
Input Bias Current	I_B	$V_{CM}=8V$		2	50	nA
Input Impedance	R_{IN}			1		G Ω
Input Capacitance	C_{IN}			2.0		pF
Common-Mode Input Range	CMIR		-0.5		+15.5	V
Common-Mode Rejection Ratio	CMRR	$-0.5V \leq V_{IN} \leq +16.5V$	50	75		dB
Open-Loop Gain	A_{VOL}	$+0.5V \leq V_{OUT} \leq +15.5V$	68	80		dB
Output Characteristics						
Output Swing Low	V_{OL}	$I_L=-5mA$		70	120	mV
Output Swing High	V_{OH}	$I_L=+5mA$	15.88	15.94		V
Peak Output AC Current	I_{OUT}	V_{OUT} Reaches within $\pm 3V$ from Rails		± 300		mA
Power Supply Performance						
Power Supply Rejection Ratio	PSRR	V_S from +4.5V to +16.5V	60	80		dB
Supply Current (Per Amplifier)	I_S	No Load		1.2		mA
Dynamic Performance						
Slew Rate (Rising & Falling Edges)	SR	$+1.0V \leq V_{OUT} \leq +15.0V$		30		V/ μs
Settling to $\pm 0.1\%$ ($A_V=+1$)	t_s	$V_O=2.0V$ Step @ $C_L=0pF$		100		ns
-3dB Bandwidth	B_W			30		MHz
Gain-Bandwidth Product	G_{BWP}			24		MHz
Phase Margin	P_M			50		$^\circ$
Channel Separation	CHS	$f=5MHz$		90		dB

■ ELECTRICAL CHARACTERISTICS

($V_S=+5V$, $V_S=0V$, with $R_L=10K\Omega$ and $C_L=10pF$ to 2.5V @ $T_A=25^\circ C$ unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Characteristics						
Input Offset Voltage	V_{OS}	$V_{CM}=2.5V$		3	15	mV
Average Offset Voltage Drift	T_{CVos}	Measured over Operating Temperature Range		5		$\mu V/^\circ C$
Input Bias Current	I_B	$V_{CM}=2.5V$		2	50	nA
Input Impedance	R_{IN}			1		G Ω
Input Capacitance	C_{IN}			2.0		pF
Common-Mode Input Range	CMIR		-0.5		+5.5	V
Common-Mode Rejection Ratio	CMRR	$-0.5V \leq V_{IN} \leq +5.5V$	50	70		dB
Open-Loop Gain	A_{VOL}	$+0.5V \leq V_{OUT} \leq +4.5V$	60	70		dB
Output Characteristics						
Output Swing Low	V_{OL}	$I_L=-5mA$		70	140	mV
Output Swing High	V_{OH}	$I_L=+5mA$	4.86	4.94		V
Peak Output AC Current	I_{OUT}	V_{OUT} Reaches within $\pm 3V$ from Rails		± 300		mA
Power Supply Performance						
Power Supply Rejection Ratio	PSRR	V_S from +4.5V to +15.5V	60	80		dB
Supply Current (Per Amplifier)	I_S	No Load		1.0		mA
Dynamic Performance						
Slew Rate (Rising & Falling Edges)	SR	$+1.0V \leq V_{OUT} \leq +4.0V$		25		V/ μs
Settling to $\pm 0.1\%$ ($A_V=+1$)	t_s	$V_O=2.0V$ Step @ $C_L=0pF$		100		ns
-3dB Bandwidth	B_W			25		MHz
Gain-Bandwidth Product	G_{BWP}			20		MHz
Phase Margin	P_M			50		$^\circ$
Channel Separation	CHS	$f=5MHz$		90		dB

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.