



U74AHCT1G32

CMOS IC


SINGLE 2-INPUT POSITIVE-OR GATE

DESCRIPTION

The UTC **U74AHCT1G32** is a single 2-input positive-or gate, which provides the function $Y=A+B$ in positive logic.

FEATURES

- * Inputs are TTL voltage compatible
- * Operate from 4.5V to 5.5V
- * Max t_{PD} of 8ns @ 5 V
- * Low power dissipation: $I_{CC}=10\mu A(\text{Max}) @ T_A=25^\circ C$

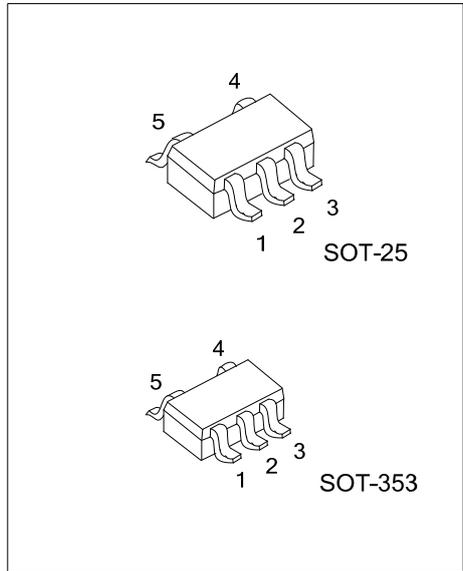


ORDERING INFORMATION


| Ordering Number | Package | Packing |
|--------------------|---------|-----------|
| U74AHCT1G32G-AF5-R | SOT-25 | Tape Reel |
| U74AHCT1G32G-AL5-R | SOT-353 | Tape Reel |

| | |
|--|---|
| <p>U74AHCT1G32G-AF5-R</p> <p>(1) Packing Type (2) Package Type (3) Green Package</p> | <p>(1) R: Tape Reel (2) AF5: SOT-25, AL5: SOT-353 (3) G: Halogen Free and Lead Free</p> |
|--|---|

MARKING



■ PIN CONFIGURATION

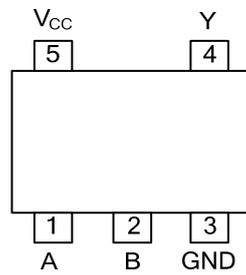


■ FUNCTION TABLE

| INPUT(A) | INPUT(B) | OUTPUT(Y) |
|----------|----------|-----------|
| H | X | H |
| X | H | H |
| L | L | L |

Note: H: high voltage level; L: low voltage level.

■ LOGIC DIAGRAM



Logic symbol

■ ABSOLUTE MAXIMUM RATING

| PARAMETER | SYMBOL | RATINGS | UNIT |
|-------------------------|-----------|-----------------------|------|
| Supply Voltage | V_{CC} | -0.5 ~ 7 | V |
| Input Voltage | V_{IN} | -0.5 ~ 7 | V |
| Output Voltage | V_{OUT} | -0.5 ~ $V_{CC} + 0.5$ | V |
| V_{CC} or GND Current | I_{CC} | ±50 | mA |
| Output Current | I_{OUT} | ±25 | mA |
| Input Clamp Current | I_{IK} | -20 | mA |
| Output Clamp Current | I_{OK} | ±20 | mA |
| Operating Temperature | T_{OPR} | -40 ~ +85 | °C |
| Storage Temperature | T_{STG} | -65 ~ +150 | °C |

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING CONDITIONS

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|------------------------------------|------------|-----------------|-----|-----|----------|------|
| Supply Voltage | V_{CC} | | 4.5 | | 5.5 | V |
| Input Voltage | V_{IN} | | 0 | | 5.5 | V |
| Output Voltage | V_{OUT} | | 0 | | V_{CC} | V |
| High-level Input Voltage | V_{IH} | | 2 | | | V |
| Low-level Input Voltage | V_{IL} | | | | 0.8 | V |
| High-level Output Current | I_{OH} | | | | -8 | mA |
| Low-level Output Current | I_{OL} | | | | 8 | mA |
| Input Transition Rise or Fall Rate | t_R, t_F | | | | 20 | ns/V |

■ ELECTRICAL CHARACTERISTICS

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-------------------------------------|---------------|--|------|-----|------|------|
| High-Level Output Voltage | V_{OH} | $V_{CC}=4.5V, I_{OH}=-50\mu A$ | 4.4 | 4.5 | | V |
| | | $V_{CC}=4.5V, I_{OH}=-8mA$ | 3.94 | | | |
| Low-Level Output Voltage | V_{OL} | $V_{CC}=4.5V, I_{OH}=50\mu A$ | | | 0.1 | V |
| | | $V_{CC}=4.5V, I_{OH}=8mA$ | | | 0.36 | |
| Input Leakage Current | $I_{I(LEAK)}$ | $V_{CC}=0\sim 5.5V, V_{IN}=5.5V$ or GND | | | ±0.1 | μA |
| Quiescent Supply Current | I_Q | $V_{CC}=5.5V, V_{IN}=V_{CC}$ or GND, $I_{OUT}=0$ | | | 1 | μA |
| Additional Quiescent Supply Current | ΔI_Q | $V_{CC}=5.5V$, One input at 3.4V, Other inputs at V_{CC} or GND | | | 1.35 | mA |
| Input Capacitance | C_I | $V_{CC}=4.5V, V_{IN}=V_{CC}$ or GND | | 2 | 10 | pF |


■ DYNAMIC CHARACTERISTICS

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|---|-----------|-------------------------------|-----|-----|-----|------|
| Propagation Delay Time Input(A or B) to Output(Y) | t_{PLH} | $V_{CC}=5V\pm 0.5V, C_L=15pF$ | | 5 | 6.9 | ns |
| | t_{PHL} | | | 5 | 6.9 | |
| | t_{PLH} | $V_{CC}=5V\pm 0.5V, C_L=50pF$ | | 5.5 | 7.9 | |
| | t_{PHL} | | | 5.5 | 7.9 | |


■ OPERATING CHARACTERISTICS ($T_A=25^\circ C$, unless otherwise specified)

| PARAMETER | SYMBOL | TEST CONDITIONS | MIN | TYP | MAX | UNIT |
|-------------------------------|----------|-------------------------------|-----|------|-----|------|
| Power Dissipation Capacitance | C_{PD} | $V_{CC}=5V, f=1MHz$, No load | | 11.5 | | pF |


■ TEST CIRCUIT AND WAVEFORMS

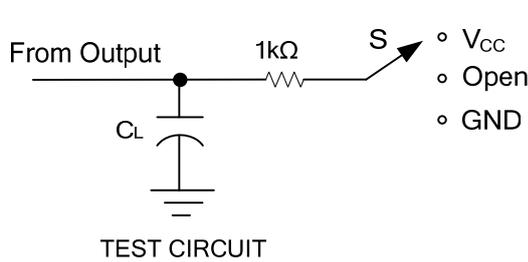


| TEST | S |
|------------------------------------|-----------------|
| t _{PLH} /t _{PHL} | Open |
| t _{PHZ} /t _{PZH} | GND |
| t _{PLZ} /t _{PZL} | V _{CC} |

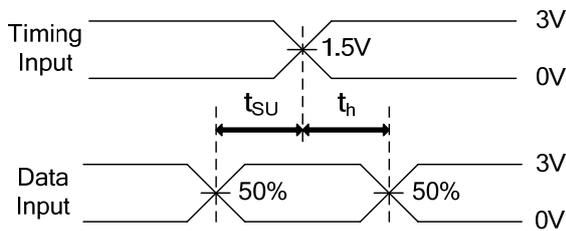


SETUP TIME AND HOLD TIME

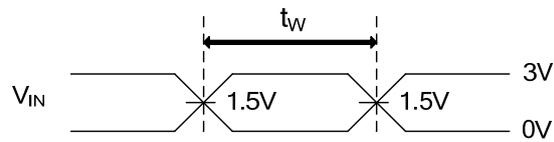

PULSE WIDTH

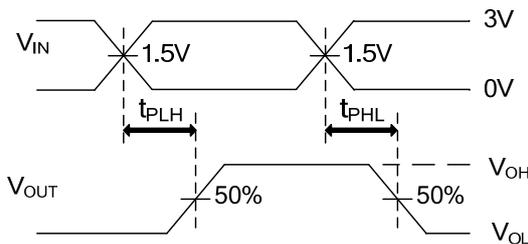

PROPAGATION DELAY TIMES

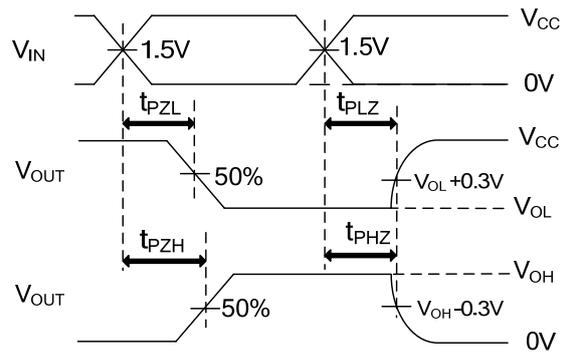

ENABLE AND DISABLE TIMES

Note: C_L includes probe and jig capacitance.
 P_{RR} ≅ 1MHz, Z_O=50Ω, t_R ≅ 3ns, t_F ≅ 3ns

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.