


U74AHCT4066

CMOS IC

QUADRUPLE BILATERAL ANALOG SWITCH

■ DESCRIPTION

The **U74AHCT4066** is a quadruple bilateral analog switch which has 4 channels.



SOP-14

■ FEATURES


- * Inputs Are TTL-Voltage Compatible
- * Max t_{PD} of 6ns at 5 V
- * Low Power Dissipation: $I_{CC}=2\mu A$ (Max)
- * Low Input Current: $I_{IN}=1\mu A$ (Max)

■ ORDERING INFORMATION


Ordering Number	Package	Packing
U74AHCT4066G-S14-R	SOP-14	Tape Reel

U74AHCT4066G-S14-T A diagram showing the marking code U74AHCT4066G-S14-T. It includes a pinout for a 14-pin DIP package with pins numbered 14 down to 8. Arrows point from the code to specific pins: pin 14 points to the Date Code, pin 13 points to the Lot Code, and pins 1 through 7 point to the package body.	(1)Packing Type (2)Package Type (3)Green Package	(1) R: Tape Reel (2) S14: SOP-14 (3) G: Halogen Free and Lead Free
---	--	--

■ MARKING

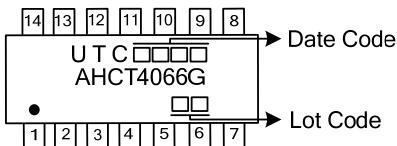

■ PIN CONFIGURATION

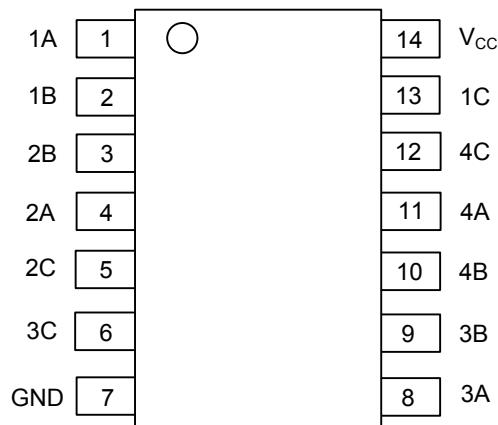


■ FUNCTION TABLE

INPUTS CONTROL (C)	SWITCH
H	ON
L	OFF

Note: H: HIGH voltage level; L: LOW voltage level.

■ LOGIC DIAGRAM

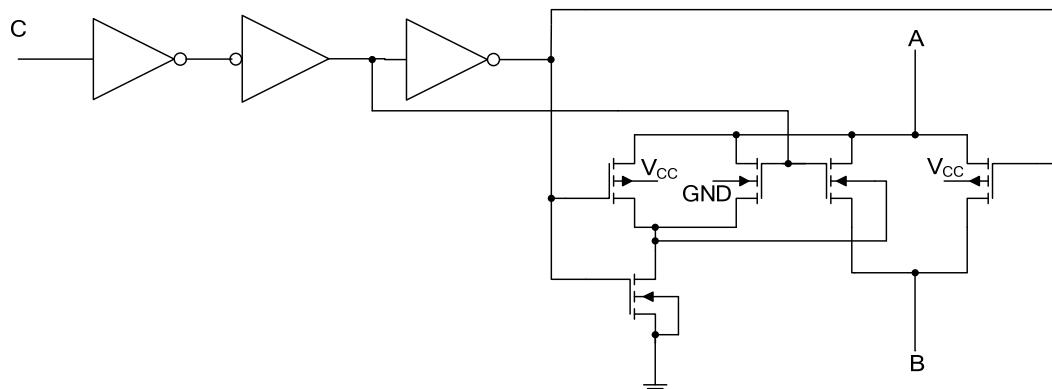

One Of Four Switches

■ ABSOLUTE MAXIMUM RATING ($T_A=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage Range	V_{CC}	-0.5 ~ +7	V
Input Voltage Range	V_C	-0.5 ~ +7	V
Switch I/O Voltage Range	V_{IO}	-0.5 ~ V_{CC} +0.5	V
V_{CC} or GND Current	I_{CC}	± 50	mA
I/O Diode Current	I_{IOK}	± 50	mA
Control Input Clamp Current	I_{IK}	-20	mA
On-state Switch Current	I_T	± 25	mA
Operating Temperature	T_{OPR}	-40 ~ + 85	$^\circ\text{C}$
Storage Temperature	T_{STG}	-65 ~ + 150	$^\circ\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ_{JA}	86	$^\circ\text{C/W}$

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	V_{CC}		4.5		5.5	V
High-Level Input Voltage	V_{IH}	$V_{CC}=4.5\text{V}$ to 5.5V	2			V
Low-Level Input Voltage	V_{IL}	$V_{CC}=4.5\text{V}$ to 5.5V			0.8	V
Control Input Voltage	V_C		0		5.5	V
Input/Output Voltage	V_{IO}		0		V_{CC}	V
Input Transition Rise or Fall Rate	t_R / t_F	$V_{CC}=4.5\text{V}$ to 5.5V	0		20	ns/V

■ ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
On-state Switch Resistance	R_{ON}			21	75	Ω
Peak On-state Resistance	$R_{ON(P)}$	$V_{CC}=4.5\text{V}$, $I_T=-1\text{mA}$,		31	100	Ω
Difference In On-state Resistance Between Switches	ΔR_{ON}	$V_{IN}=\text{GND}$ or V_{CC} , $V_{CC}=V_{IH}$	2	15		Ω
Control Input Current	$I_{I(CTL)}$	$V_{CC}=5.5\text{V}$, $V_C=5.5\text{V}$ or GND			± 0.1	μA
On-state Switch Leakage Current	$I_{S(ON)}$	$V_{CC}=5.5\text{V}$, $V_I=V_{CC}$ or GND, $V_C=V_{IH}$			± 0.1	μA
Off-state Switch Leakage Current	$I_{S(OFF)}$	$V_{CC}=5.5\text{V}$, $V_I=V_{CC}$ and $V_O=\text{GND}$, or $V_I=\text{GND}$ and $V_O=V_{CC}$, $V_C=V_{IL}$			± 0.1	μA
Quiescent Supply Current	I_Q	$V_{CC}=5.5\text{V}$, $V_C=V_{CC}$ or GND			2	μA
Control Input Capacitance	C_{IC}			1.5		pF
Feed-through Capacitance	C_F			0.5		pF
Switch Input/Output Capacitance	C_{IO}			5.5		pF

■ SWITCHING CHARACTERISTICS ($T_A=25^\circ C$, SEE TEST CIRCUIT AND WAVEFORMS)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
Propagation Delay Time, From (A) to (B) Or (B) to (A)	t_{PLH}/t_{PHL}	$V_{CC}=5V \pm 0.5V$	$C_L = 15pF$	0.3	4	ns	
			$C_L = 50pF$	0.6	6	ns	
			$C_L = 15pF$	1.6	7	ns	
	t_{PZL}/t_{PZH}		$C_L = 50pF$	2.1	12	ns	
			$C_L = 15pF$	3.2	7	ns	
			$C_L = 50pF$	5.1	12	ns	


■ ANALOG SWITCHING CHARACTERISTICS ($T_A=25^\circ C$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Frequency Response(Switch On), From A to B Or B to A		$C_L=50pF, R_L=600\Omega, f_{in}=1MHz, 20\log_{10} (V_O/V_I)=-3dB$		50		MHz
Crosstalk(Between Any Switches), From A to B Or B to A				-45		dB
Crosstalk(Control Input To Signal Output), From C to A or B				50		mV
Feed-Through Attenuation (Switch Off), From A to B Or B to A				-40		dB
Sine-Wave Distortion		$C_L=50pF, R_L=10K\Omega, f_{in}=1KHz$	$V_{CC}=4.5V, V_I=4 V_{P-P}$	0.1		%


■ OPERATING CHARACTERISTICS ($T_A=25^\circ C$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Power Dissipation Capacitance	C_{PD}	$C_L = 50pF, f=1MHz$		4.5		pF

■ TEST CIRCUIT AND WAVEFORMS

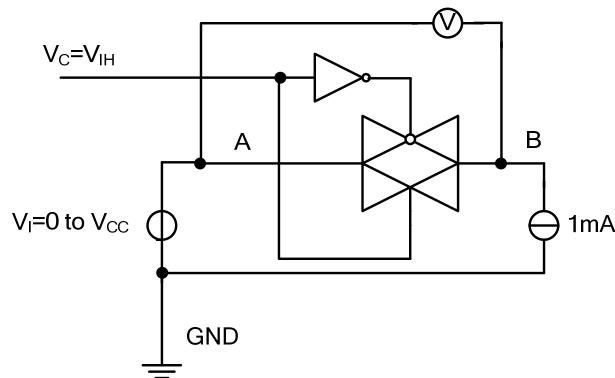


Test circuit for measuring ON-state resistance R_{ON}

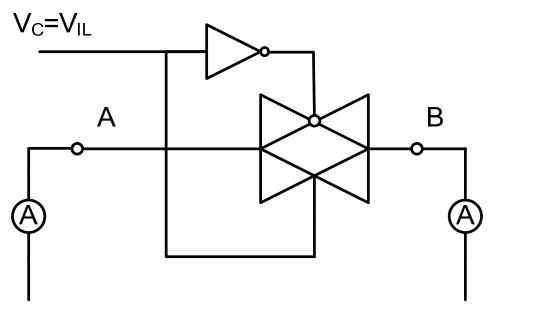


$V_I = V_{CC}$ or GND $V_O = \text{GND}$ or V_{CC}

Test circuit for measuring OFF-state current

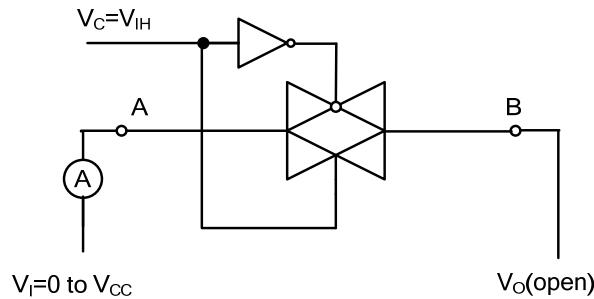



Test circuit for measuring ON-state current

■ TEST CIRCUIT AND WAVEFORMS(Cont.)

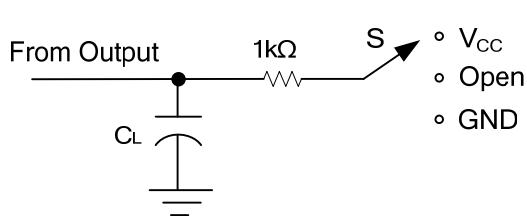

TEST	S	V_I
t_{PLH}/t_{PHL}	Open	Pulse
t_{PHZ}/t_{PZH}	GND	V_{CC}
t_{PLZ}/t_{PZL}	V_{CC}	GND

Test circuit for measuring propagation delay time, switching time

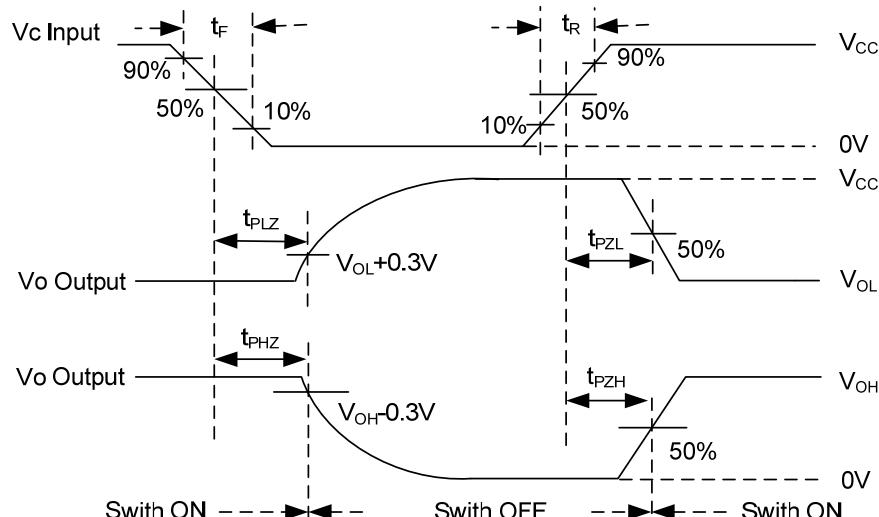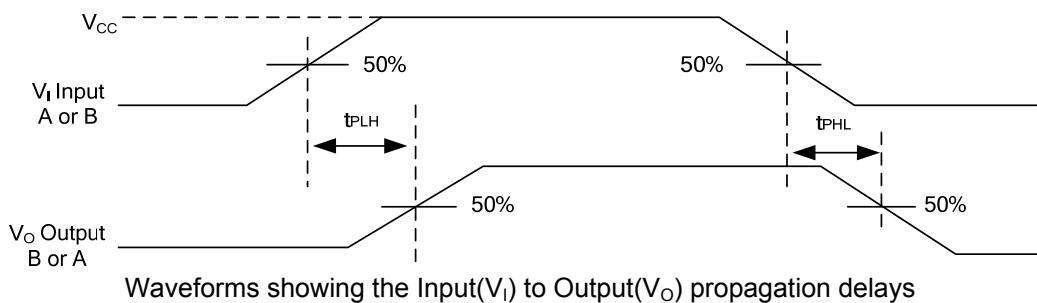

Note: C_L includes probe and jig capacitance.

All input pulses are supplied by generators having the following characteristics: PRR $\leq 1\text{MHz}$, $Z_0 = 50\Omega$, $t_r \leq 3\text{ns}$, $t_f \leq 3\text{ns}$.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.