



CR03AM-16

Preliminary

SCR

THYRISTOR LOW POWER USE

DESCRIPTION



The UTC **CR03AM-16** is a thyristor, it uses UTC's advanced technology to provide customers with low gate trigger current and high repetitive peak off-state voltage, etc.

The UTC **CR03AM-16** is suitable for gas igniter, timer, and leakage protector.

FEATURES

- * Low gate trigger current
- * High repetitive peak off-state voltage

SYMBOL

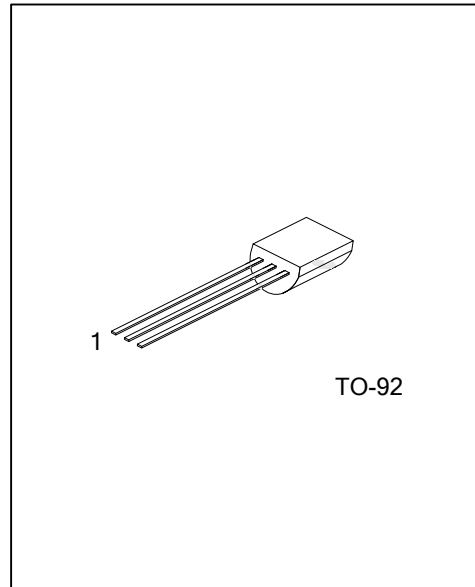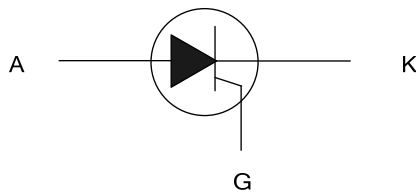


ORDERING INFORMATION

Ordering Number	Package	Pin Assignment			Packing
		1	2	3	
CR03AMG-16-T92-B	TO-92	G	A	K	Tape Box
CR03AMG-16-T92-K	TO-92	G	A	K	Bulk

Note: Pin assignment: G: Gate A: Anode K: Cathode

<p>CR03AMG-16-T92-B</p>	<p>(1) B: Tape Box, K: Bulk (2) T92: TO-92 (3) G: Halogen Free and Lead Free</p>
-------------------------	--

MARKING



■ ABSOLUTE MAXIMUM RATINGS

PARAMETER		SYMBOL	RATINGS	UNIT
Repetitive Peak Reverse Voltage		V_{RRM}	800	V
Non-Repetitive Peak Reverse Voltage		V_{RSM}	960	V
DC Reverse Voltage		$V_{R(DC)}$	640	V
Repetitive Peak Off-State Voltage (Note 1)		V_{DRM}	800	V
Non-Repetitive Peak Off-State Voltage (Note 1)		V_{DSM}	960	V
DC Off-State Voltage (Note 1)		$V_{D(DC)}$	640	V
RMS On-State Current		$I_{T(RMS)}$	0.47	A
Average On-State Current	Commercial Frequency, Sine Half Wave 180° Conduction, $T_A=62^\circ\text{C}$	$I_{T(AV)}$	0.3	A
Surge On-State Current	60 Hz Sine Half Wave, 1 Full Cycle, Peak Value, Non-Repetitive	I_{TSM}	20	A
I^2t for Fusing	Value Corresponding to 1 Cycle of Half Wave 60Hz, Surge On-State Current	I^2t	1.6	A^2s
Peak Gate Power Dissipation		P_{GM}	0.5	W
Average Gate Power Dissipation		$P_{G(AV)}$	0.1	W
Peak Gate Forward Voltage		V_{FGM}	6	V
Peak Gate Reverse Voltage		V_{RGM}	6	V
Peak Gate Forward Current		I_{FGM}	0.3	A
Mass (Typical Value)			0.23	g
Operating Junction Temperature		T_J	-40~+125	$^\circ\text{C}$
Storage Temperature		T_{STG}	-40~+125	$^\circ\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied
 2. With gate to cathode resistance $R_{GK}=1\text{k}\Omega$

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ_{JA}	180	$^\circ\text{C/W}$

■ ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Repetitive Peak Reverse Current	I_{RRM}	$T_J=125^\circ\text{C}$, V_{RRM} Applied			0.1	mA
Repetitive Peak Off-State Current	I_{DRM}	$T_J=125^\circ\text{C}$, V_{DRM} Applied, $R_{GK}=1\text{k}\Omega$			0.1	mA
On-State Voltage	V_{TM}	$T_J=25^\circ\text{C}$, $I_{TM}=4\text{A}$ Instantaneous Value			1.8	V
Gate Trigger Voltage	V_{GT}	$T_J=25^\circ\text{C}$, $V_D=6\text{V}$, $I_T=0.1\text{A}$ (Note 1)			0.8	V
Gate Non-Trigger Voltage	V_{GD}	$T_J=125^\circ\text{C}$, $V_D=1/2V_{DRM}$ $R_{GK}=1\text{k}\Omega$	0.2			V
Gate Trigger Current (Note)	I_{GT}	$T_J=25^\circ\text{C}$, $V_D=6\text{V}$, $I_T=0.1\text{A}$ (Note 1)	1		100	μA
Holding Current	I_H	$T_J=25^\circ\text{C}$, $V_D=12\text{V}$, $R_{GK}=1\text{k}\Omega$			3	mA


Note: If special values of I_{GT} are required, choose item D or E from those listed in the table below if possible.

■ CLASSIFICATION OF I_{GT}

RANK	D	E
I_{GT}	1~50	20~100

Note: The above values do not include the current flowing through the $1\text{k}\Omega$ resistance between the gate and cathode.

■ I_{GT} , V_{GT} MEASUREMENT CIRCUIT

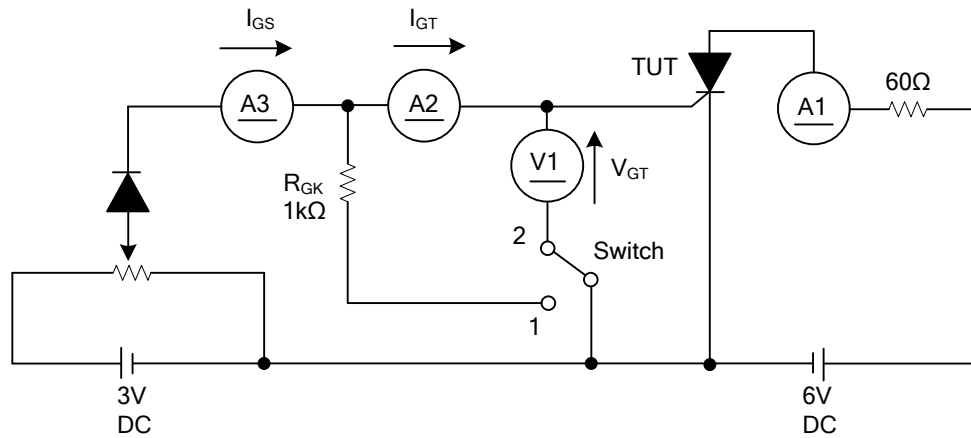

Switch 1: I_{GT} Measurement

Switch 2: V_{GT} Measurement

(Inner resistance of voltage meter is about 1k Ω)

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.