




# 2SC4617

## NPN SILICON TRANSISTOR

### GENERAL PURPOSE TRANSISTOR

■ FEATURES

- \* Low Cob  
Cob=2.0pF (typ)
- \* Complements the UTC 2SA1774

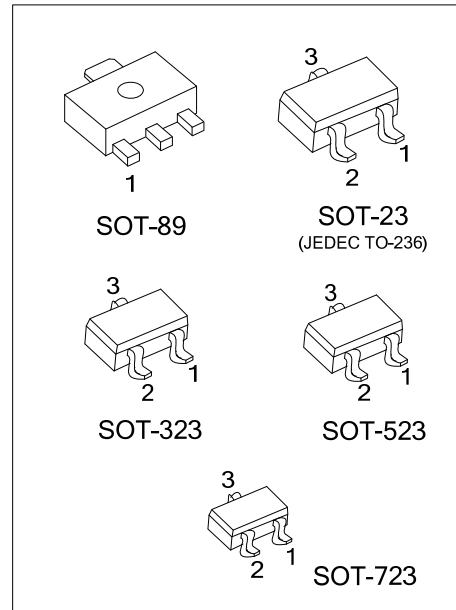

■ ORDERING INFORMATION

Ordering Number Halogen Free	Package	Pin Assignment			Packing
		1	2	3	
2SC4617G-x-AB3-R	SOT-89	B	C	E	Tape Reel
2SC4617G-x-AE3-R	SOT-23	E	B	C	Tape Reel
2SC4617G-x-AL3-R	SOT-323	E	B	C	Tape Reel
2SC4617G-x-AN3-R	SOT-523	E	B	C	Tape Reel
2SC4617G-x-AQ3-R	SOT-723	E	B	C	Tape Reel

Note: Pin assignment: E: Emitter B: Base C: Collector

<p>2SC4617G-x-AB3-R</p> <p>(1) Packing Type (2) Package Type (3) Rank (4) Green Package</p>	<p>(1) R: Tape Reel (2) AB3: SOT-89, AE3: SOT-23, AL3: SOT-323, AN3: SOT-523, AQ3: SOT-723 (3) Refer to CLASSIFICATION OF <math>h_{FE}</math> (4) G: Halogen Free and Lead Free</p>
---	---

■ MARKING

SOT-89	SOT-23 / SOT-323 / SOT-523 / SOT-723

■ ABSOLUTE MAXIMUM RATINGS (Ta = 25°C)

PARAMETER		SYMBOL	RATINGS	UNIT
Collector-Base Voltage		$V_{CBO}$	60	V
Collector-Emitter Voltage		$V_{CEO}$	50	V
Emitter-Base Voltage		$V_{EBO}$	7	V
Collector Current		$I_C$	0.15	A
Collector Power Dissipation	SOT-89	$P_C$	500	mW
	SOT-523		150	mW
	SOT-23/SOT-323		200	mW
	SOT-723		125	mW
Junction Temperature		$T_J$	+150	°C
Storage Temperature		$T_{STG}$	-55 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS (Ta = 25°C, unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector Base Breakdown Voltage	$BV_{CBO}$	$I_C = 50\mu A$	60			V
Collector Emitter Breakdown Voltage	$BV_{CEO}$	$I_C = 1mA$	50			V
Emitter-base Breakdown Voltage	$BV_{EBO}$	$I_E = 50\mu A$	7			V
Collector Cut-Off Current	$I_{CBO}$	$V_{CB} = 60V$			0.1	$\mu A$
Emitter Cut-Off Current	$I_{EBO}$	$V_{EB} = 7V$			0.1	$\mu A$
DC Current Gain	$h_{FE}$	$V_{CE} = 6V, I_C = 1mA$	120		560	
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C = 50mA, I_B = 5mA$			0.4	V
Transition Frequency	$f_T$	$V_{CE} = 12V, I_E = -2mA, f = 100MHz$		180		MHz
Output Capacitance	$C_{ob}$	$V_{CE} = 12V, I_E = 0A, f = 1MHz$		2	3.5	pF

■ CLASSIFICATION OF  $h_{FE}$


RANK	Q	R	S
RANGE	120 ~ 270	180 ~ 390	270 ~ 560

## TYPICAL CHARACTERISTICS


Grounded Emitter Propagation Characteristics

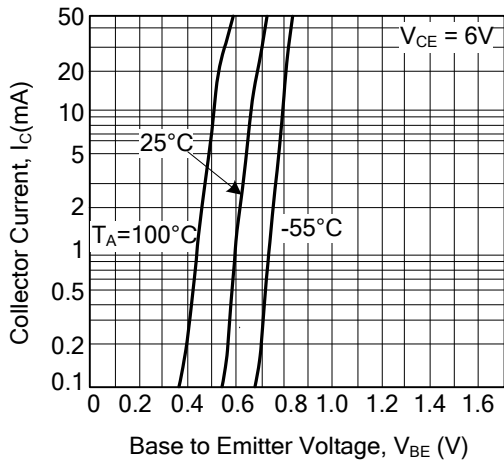


Grounded Emitter Output Characteristics (I)

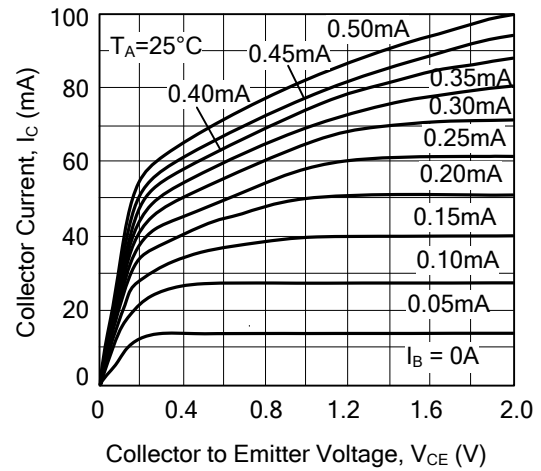


Grounded Emitter Output Characteristics (II)

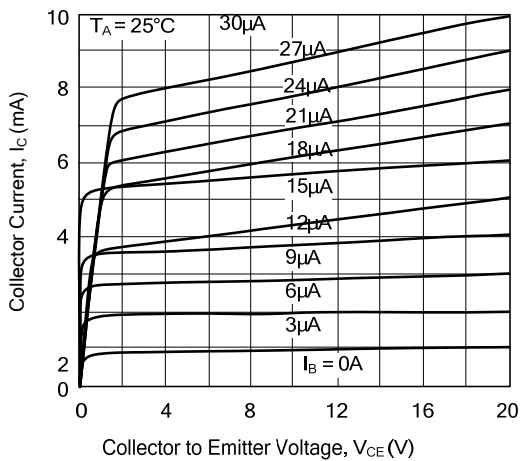


DC Current Gain vs. Collector Current (I)

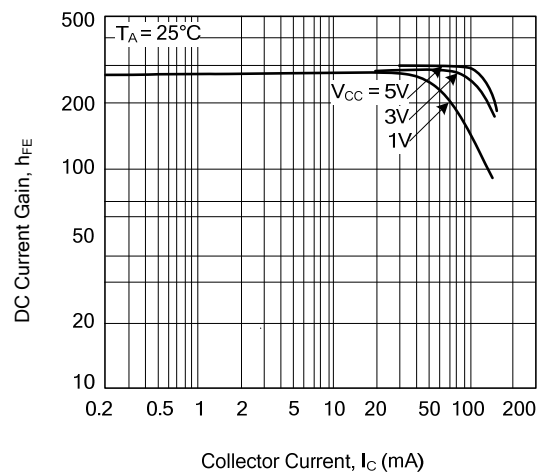






DC Current Gain vs. Collector Current (II)

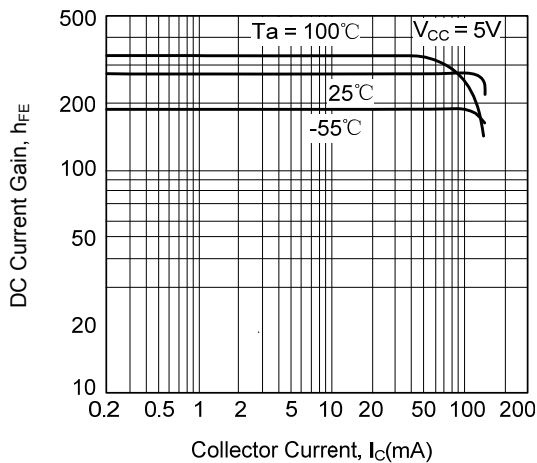

Collector-Emitter Saturation Voltage vs. Collector Current

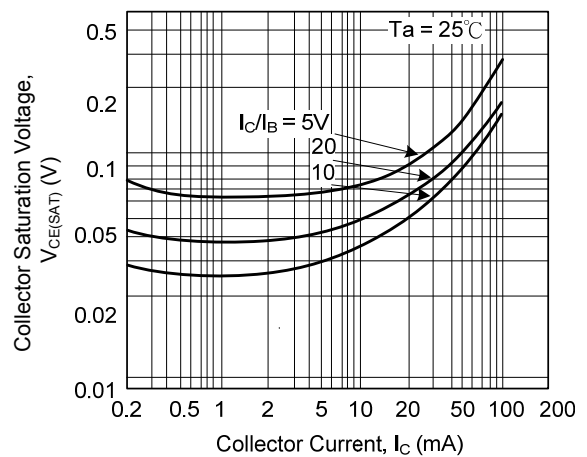

### TYPICAL CHARACTERISTICS

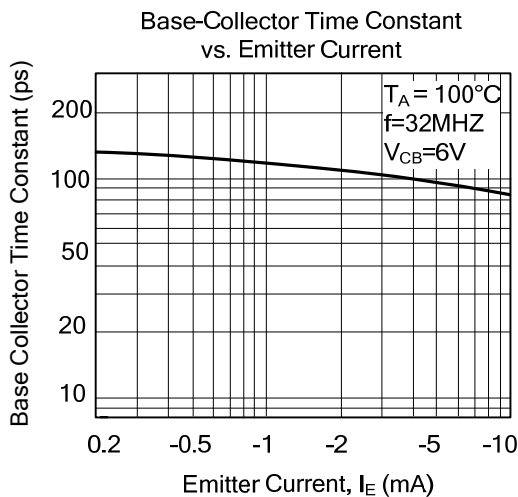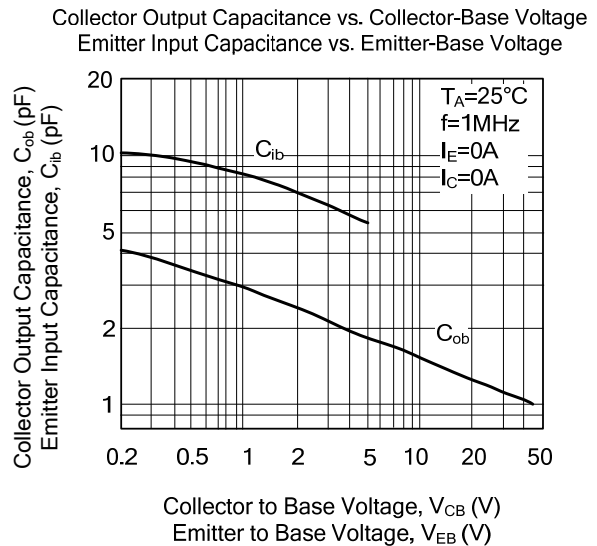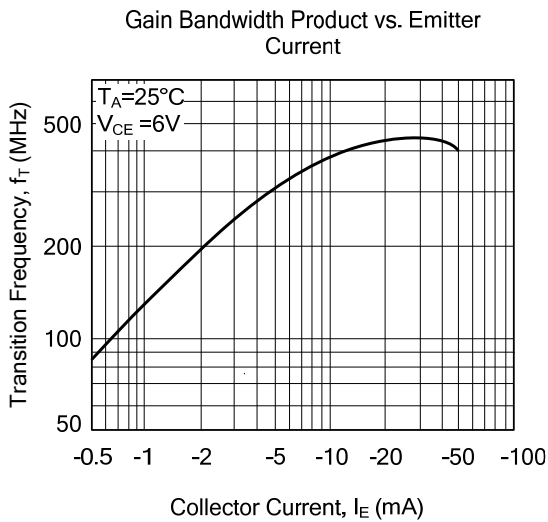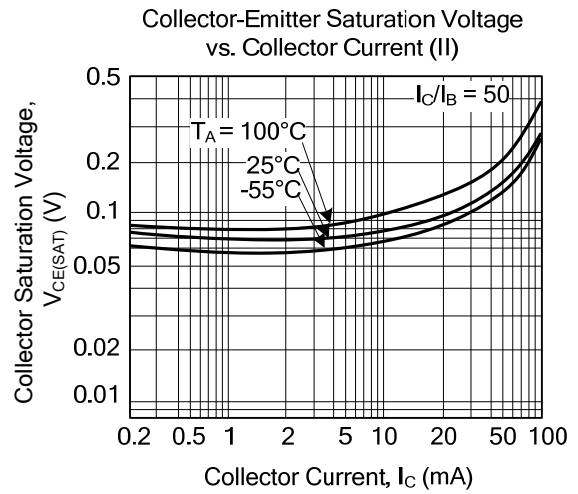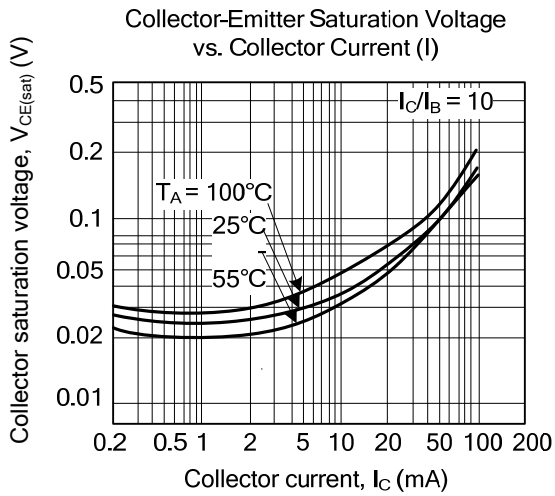

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.