



UG9J

Preliminary

NPN EPITAXIAL SILICON TRANSISTOR

NPN EPITAXIAL TRANSISTOR


DESCRIPTION

The UTC **UG9J** is an NPN epitaxial transistor; it uses UTC's advanced technology to provide the customers with low collector-emitter saturation voltage, etc.


The UTC **UG9J** is suitable for switching, inverter circuit and driver circuit applications.

FEATURES

- * Low collector-emitter saturation voltage
- * With built-in bias resistors
- * Simplify circuit design

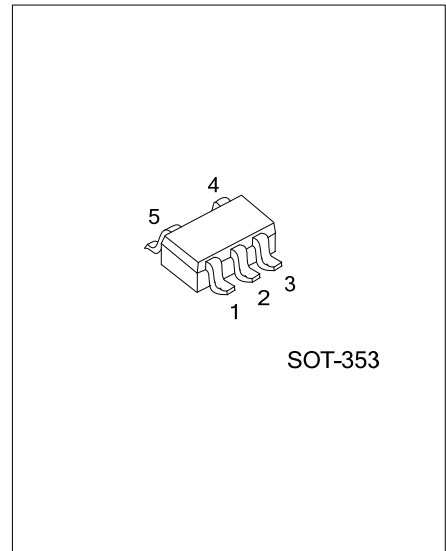

EQUIVALENT CIRCUIT




ORDERING INFORMATION

Ordering Number	Package	Pin Assignment					Packing
		1	2	3	4	5	
UG9JG-AL5-R	SOT-353	B1	E	B2	C2	C1	Tape Reel

Note: Pin Assignment: B: Base C: Collector E: Emitter

<p>UG9JG-AL5-R</p> <p>(1) Packing Type</p> <p>(2) Package Type</p> <p>(3) Green Package</p>	<p>(1) R: Tape Reel</p> <p>(2) AL5: SOT-353</p> <p>(3) G: Halogen Free and Lead Free</p>
---	--

MARKING



■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Collector-Base Voltage	V_{CBO}	50	V
Collector-Emitter Voltage	V_{CEO}	50	V
Emitter-Base Voltage	V_{EBO}	10	V
Collector Current	I_C	100	mA
Collector Power Dissipation (Total rating)	P_C	200	mW
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature	T_{STG}	-55 ~150	$^\circ\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. These characteristics apply to TR1 and TR2.

■ ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector Cut-Off Current	I_{CBO}	$V_{CB}=50\text{V}, I_E=0$			100	nA
	I_{CEO}	$V_{CE}=50\text{V}, I_B=0$			500	nA
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=10\text{V}, I_C=0$	0.38		0.71	mA
DC Current Gain	h_{FE}	$V_{CE}=5\text{V}, I_C=10\text{mA}$	50			
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C=5\text{mA}, I_B=0.25\text{mA}$		0.1	0.3	V
Input Voltage (ON)	$V_{IN(ON)}$	$V_{CE}=0.2\text{V}, I_C=5\text{mA}$	1.2		2.4	V
Input Voltage (OFF)	$V_{IN(OFF)}$	$V_{CE}=5\text{V}, I_C=0.1\text{mA}$	1.0		1.5	V
Transition Frequency	f_T	$V_{CE}=10\text{V}, I_E=5\text{mA}$		250		MHz
Input Resistor	R1		7	10	13	k Ω
Resistor Ratio	R1 / R2		0.9	1.0	1.1	

Note: These characteristics apply to TR1 and TR2.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.