



UNISONIC TECHNOLOGIES CO., LTD


## UT30P04

Power MOSFET

### P-CHANNEL ENHANCEMENT MODE POWER MOSFET

#### ■ DESCRIPTION


The UTC **UT30P04** is a P-channel enhancement mode Power MOSFET, providing customers fast switching, ruggedized device design, low on-resistance and cost-effectiveness with UTC's advanced technology.



#### ■ FEATURES

- \* Low on-Resistance
- \* Fast Switching Speed

#### ■ SYMBOL

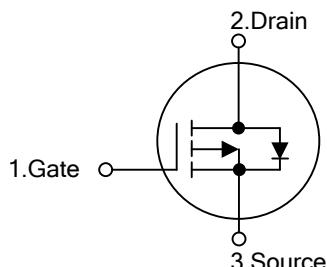


#### ■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
UT30P04L-TN3-R	UT30P04G-TN3-R	TO-252	G	D	S	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

UT30P04L-TN3-R	(1)Packing Type (2)Package Type (3)Green Package	(1) R: Tape Reel (2) TN3: TO-252 (3) L: Lead Free, G: Halogen Free and Lead Free
----------------	--	--

#### ■ MARKING

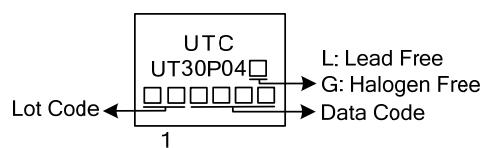

■ ABSOLUTE MAXIMUM RATINGS ( $T_A=25^\circ\text{C}$  Unless Otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		$V_{DS}$	-40	V
Gate-Source Voltage		$V_{GS}$	$\pm 20$	V
Continuous Drain Current	$T_C=25^\circ\text{C}$	$I_D$	-21	A
	$T_C=70^\circ\text{C}$		-17	A
Pulsed Drain Current (Note 2)		$I_{DM}$	-70	A
Avalanche Current		$I_{AS}$	-27	A
Avalanche Energy (Note 3)	$L=0.1\text{mH}$	$E_{AS}$	36	$\text{mJ}$
Power Dissipation	$T_C=25^\circ\text{C}$	$P_D$	30	W
	$T_C=70^\circ\text{C}$		20	W
Operating Junction Temperature		$T_J$	-55~150	$^\circ\text{C}$
Storage Temperature		$T_{STG}$	-55~150	$^\circ\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Pulse width limited by maximum junction temperature.

3.  $V_{DD}=-20\text{V}$ . Starting  $T_J=25^\circ\text{C}$ .

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient		$\theta_{JA}$	40	$^\circ\text{C/W}$
Junction to Case		$\theta_{JC}$	4.1	$^\circ\text{C/W}$





■ ELECTRICAL CHARACTERISTICS ( $T_J = 25^\circ\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>OFF CHARACTERISTICS</b>						
Drain-Source Breakdown Voltage	$\text{BV}_{\text{DSS}}$	$I_D = -250\mu\text{A}, V_{GS} = 0\text{V}$	-40			V
Drain-Source Leakage Current	$I_{\text{DSS}}$	$V_{DS} = -32\text{V}, V_{GS} = 0\text{V}$ $V_{DS} = -30\text{V}, V_{GS} = 0\text{V}, T_J = 125^\circ\text{C}$		1	10	$\mu\text{A}$
Gate- Source Leakage Current	$I_{\text{GSS}}$	$V_{DS} = 0\text{V}, V_{GS} = \pm 20\text{V}$			$\pm 250$	nA
On-State Drain Current (Note 1)	$I_{\text{D(ON)}}$	$V_{DS} = -5\text{V}, V_{GS} = -10\text{V}$	-70			A
<b>ON CHARACTERISTICS</b>						
Gate Threshold Voltage	$V_{GS(\text{TH})}$	$V_{DS} = V_{GS}, I_D = -250\mu\text{A}$	-1	-2.5	-3	V
Static Drain-Source On-State Resistance (Note 1)	$R_{\text{DS(ON)}}$	$V_{GS} = -5\text{V}, I_D = -8\text{A}$		65	73	$\text{m}\Omega$
		$V_{GS} = -7\text{V}, I_D = -8\text{A}$		35	50	
		$V_{GS} = -10\text{V}, I_D = -10\text{A}$		30	40	
Forward Transconductance (Note 1)	$g_{\text{FS}}$	$V_{DS} = -10\text{V}, I_D = -10\text{A}$		20		S
Gate Resistance	$R_g$	$V_{GS} = 0\text{V}, V_{DS} = 0\text{V}, f = 1.0\text{MHz}$		4.95		$\Omega$
<b>DYNAMIC PARAMETERS</b>						
Input Capacitance	$C_{\text{ISS}}$	$V_{GS} = 0\text{V}, V_{DS} = -20\text{V}, f = 1.0\text{MHz}$		1090		$\text{pF}$
Output Capacitance	$C_{\text{OSS}}$			175		
Reverse Transfer Capacitance	$C_{\text{RSS}}$			91		
<b>GATE CHARGE (Note 2)</b>						
Total Gate Charge	$Q_G (V_{GS} = -10\text{V})$	$V_{DS} = 0.5V_{(\text{BR})\text{DSS}}, I_D = -18\text{A}$		17		$\text{nC}$
	$Q_G (V_{GS} = -4.5\text{V})$			8.5		
Gate to Source Charge	$Q_{GS}$			5.5		
Gate to Drain Charge	$Q_{GD}$			3		
<b>SWITCHING PARAMETERS (Note 2)</b>						
Turn-ON Delay Time	$t_{\text{D(ON)}}$	$V_{GS} = -10\text{V}, V_{DS} = -20\text{V}, I_D \approx -10\text{A}, R_{GS} = 6\Omega, R_L = 2\Omega$		6		ns
Rise Time	$t_R$			16		ns
Turn-OFF Delay Time	$t_{\text{D(OFF)}}$			26		ns
Fall-Time	$t_F$			10		ns
<b>SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS</b>						
Continuous Current	$I_S$				-21	A
Drain-Source Diode Forward Voltage <sup>1</sup>	$V_{SD}$	$I_F = -10\text{A}, V_{GS} = 0\text{V}$			-1.2	V
Reverse Recovery Time	$t_{\text{RR}}$	$I_F = -10\text{A}, dI_F/dt = 100\text{A}/\mu\text{s}$		15.5		ns
Reverse Recovery Charge	$Q_{RR}$			7.9		nC

Notes: 1. Pulse test: Pulse width  $\leq 300\mu\text{sec}$ , duty cycle  $\leq 2\%$ .

2. Independent of operating temperature.

■ TYPICAL CHARACTERISTICS

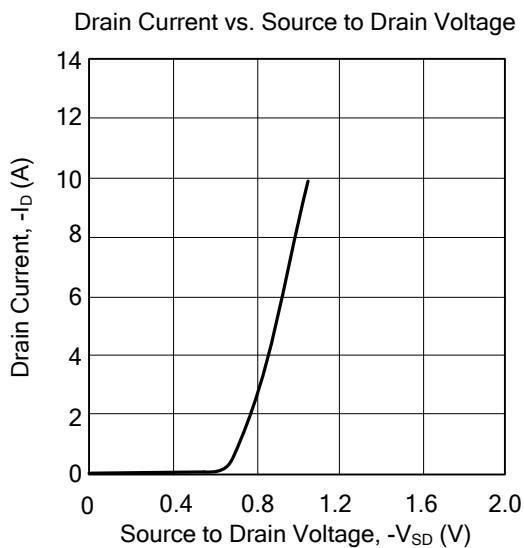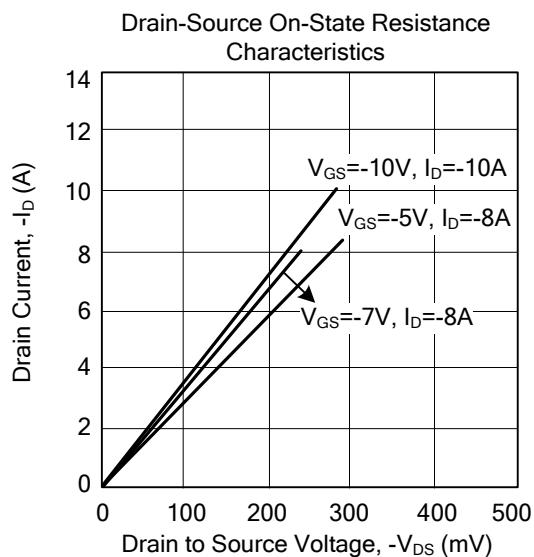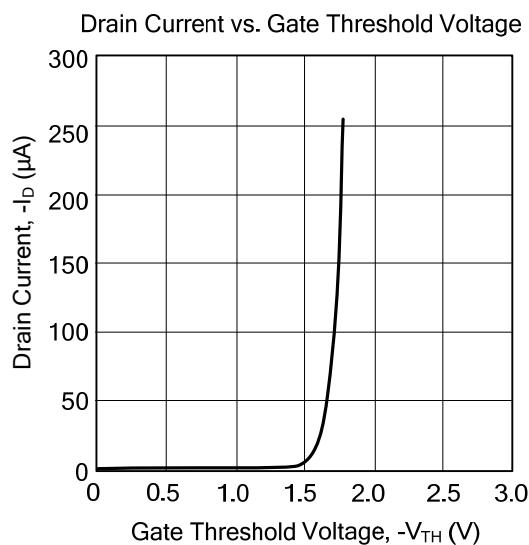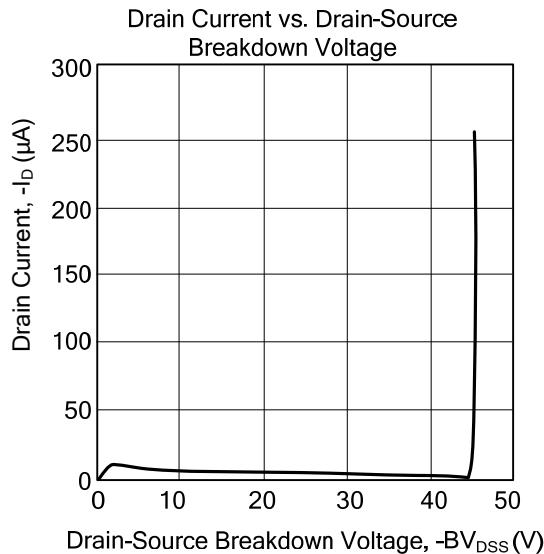

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.