



MGBR10S60

Preliminary

DIODE

MOS GATED BARRIER RECTIFIER

DESCRIPTION

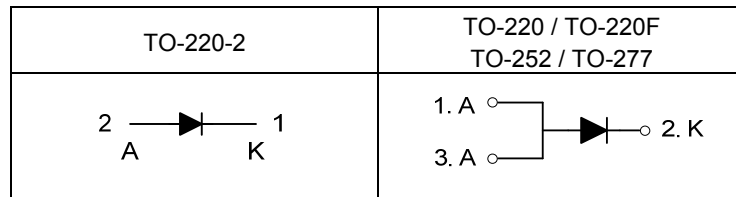
The UTC **MGBR10S60** is a mos gated barrier rectifier, it uses UTC's advanced technology to provide customers with low forward voltage drop and high current capability, etc.

The UTC **MGBR10S60** suitable for free wheeling, high frequency inverters, polarity protection, and low voltage.

FEATURES

- * Super low forward voltage drop
- * High current capability
- * High surge capability
- * High efficiency

SYMBOL

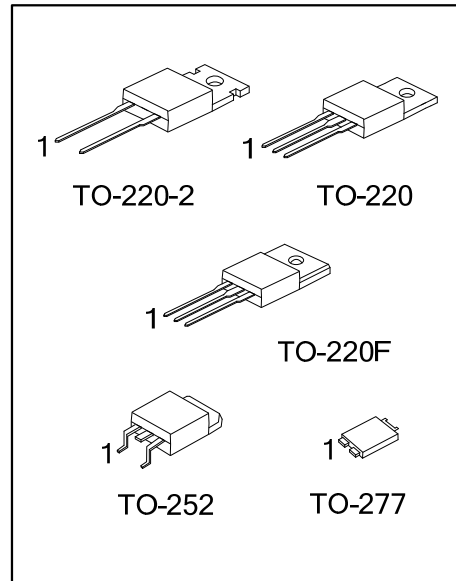


ORDERING INFORMATION

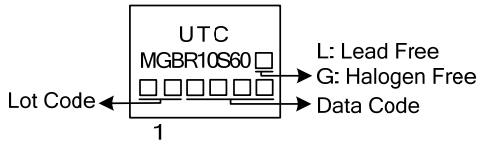
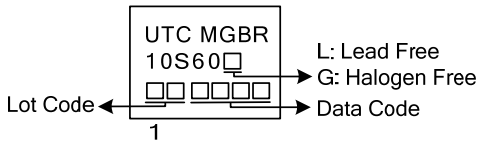
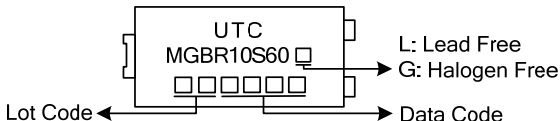
Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
MGBR10S60L-TA2-T	MGBR10S60G-TA2-T	TO-220-2	K	A	-	Tube
MGBR10S60L-TA3-T	MGBR10S60G-TA3-T	TO-220	A	K	A	Tape Reel
MGBR10S60L-TF3-T	MGBR10S60G-TF3-T	TO-220F	A	K	A	Tape Reel
MGBR10S60L-TN3-R	MGBR10S60G-TN3-R	TO-252	A	K	A	Tape Reel
MGBR10S60L-T27-R	MGBR10S60G-T27-R	TO-277	A	K	A	Tape Reel

Note: Pin Assignment: A: Anode K: Cathode

<p>MGBR10S60L-TA2-T</p> <ul style="list-style-type: none"> (1) Packing Type (2) Package Type (3) Green Package 	<ul style="list-style-type: none"> (1) T: Tube, R: Tape Reel (2) TA2: TO-220-2, TA3: TO-220, TF3: TO-220F, TN3: TO-252, T27: TO-277 (3) L: Lead Free, G: Halogen Free and Lead Free
---	--



MARKING

PACKAGE	MARKING
TO-220-2 TO-220 TO-220F	
TO252	
TO-277	

■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$ unless otherwise specified)

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitance load, derate current by 20%.

PARAMETER	SYMBOL	RATINGS	UNIT
DC Blocking Voltage (Note 1)	V_{RM}	60	V
Working Peak Reverse Voltage	V_{RWM}	60	V
Peak Repetitive Reverse Voltage	V_{RRM}	60	V
Average Rectified Output Current	I_o	10	A
Non-Repetitive Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load	I_{FSM}	175	A
Operating Junction Temperature	T_J	-65~+150	$^\circ\text{C}$
Storage Temperature	T_{STG}	-65~+150	$^\circ\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL CHARACTERISTICS (PER LEG)

PARAMETER	SYMBOL	RATINGS	UNIT	
Typical Thermal Resistance	TO-220 TO-220-2	θ_{JC}	2	$^\circ\text{C}/\text{W}$
	TO-220F		4	$^\circ\text{C}/\text{W}$
	TO-252		6	$^\circ\text{C}/\text{W}$
	TO-277		72 (Note)	$^\circ\text{C}/\text{W}$

Note: FR-4 PCB, 2 oz Copper. Minimum recommended pad layout.

■ ELECTRICAL CHARACTERISTICS (PER LEG) ($T_A=25^\circ\text{C}$ unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Reverse Breakdown Voltage	$V_{(BR)R}$	$I_R=0.50\text{mA}$	60			V
Instantaneous Forward Voltage	V_{FM}	$I_F=10\text{A}, T_C=25^\circ\text{C}$			0.54	V
		$I_F=10\text{A}, T_C=125^\circ\text{C}$			0.49	V
Leakage Current	I_{RM}	$V_R=60\text{V}, T_C=25^\circ\text{C}$			500	μA
		$V_R=60\text{V}, T_C=125^\circ\text{C}$			50	mA

Notes: 1. Pulse Test: Pulse width $\leq 300\mu\text{s}$, Duty cycle $\leq 2\%$.

2. Mounted on an FR-4 PCB, 2 oz Copper. Minimum recommended pad layout.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.