



MB1SU THRU MB10SU

SCHOTTKY BRIDGE

1.0A SURFACE MOUNT GLASS PASSIVATED BRIDGE RECTIFIER

DESCRIPTION


The UTC **MB1SU THRU MB10SU** is a 1.0A surface mount glass passivated bridge rectifiers, it uses UTC's advanced technology to provide customers with high surge current capability, etc.

The UTC **MB1SU THRU MB10SU** is suitable for surface mount application.

FEATURES

- * Low leakage
- * Surge overload rating-30A peak
- * Glass passivated die construction
- * Designed for Surface Mount Application

SYMBOL




ORDERING INFORMATION

Ordering Number	Package	Packing
MB1SUL-ABS-R	MBS	Tape Reel
MB2SUL-ABS-R	MBS	Tape Reel
MB4SUL-ABS-R	MBS	Tape Reel
MB6SUL-ABS-R	MBS	Tape Reel
MB8SUL-ABS-R	MBS	Tape Reel
MB10SUL-ABS-R	MBS	Tape Reel


<p>MB1SUL-MBS-R</p> <p>(1) Packing Type</p> <p>(2) Package Type</p> <p>(3) Green Package</p>	<p>(1) R: Tape Reel</p> <p>(2) MBS: MBS</p> <p>(3) L: Lead Free</p>
--	---

MARKING

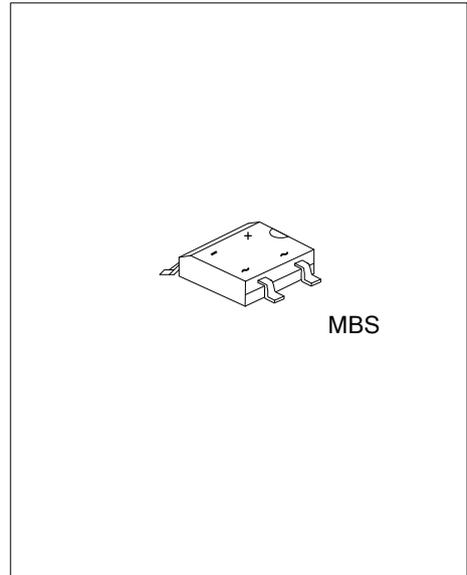

MB1SU THRU MB10SU

SCHOTTKY BRIDGE



MB1SU THRU MB10SU

SCHOTTKY BRIDGE

■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitance load, derate current by 20%.

PARAMETER	SYMBOL	RATINGS						UNIT
		MB1SU	BM2SU	MB4SU	MB6SU	BM8SU	MB10SU	
Peak Repetitive Reverse Voltage	V_{RRM}	100	200	400	600	800	1000	V
Working Peak Reverse Voltage	V_{RWM}	100	200	400	600	800	1000	V
DC Blocking Voltage	V_{DC}	100	200	400	600	800	1000	V
RMS Reverse Voltage	V_{RMS}	70	140	280	420	560	700	V
Average Rectified Output Current	$T_A=40^{\circ}\text{C}$ (Note 1) I_O	1.0						A
Peak Forward Surge Current, 8.3ms Single Half Sine-Wave Superimposed on Rated Load	I_{FSM}	35						A
Operating Junction Temperature Range	T_J	-55~+150						$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-55~+150						$^{\circ}\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Mounted on glass epoxy pc board with 1.3mm^2 solder pad.

■ THERMAL DATA






PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ_{JA}	70	$^{\circ}\text{C}/\text{W}$

Note: Measured at 1.0 MHz and applied reverse voltage of 4.0V D.C.

■ ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Instantaneous Forward Voltage	V_F	$I_F=1.0\text{A}$			1.1	V
DC Reverse Current at Rated DC Blocking Voltage	I_R	$T_J=25^{\circ}\text{C}$			5.0	μA
		$T_J=125^{\circ}\text{C}$			500	μA
Junction Capacitance	C_J			13		pF

TYPICAL CHARACTERISTICS

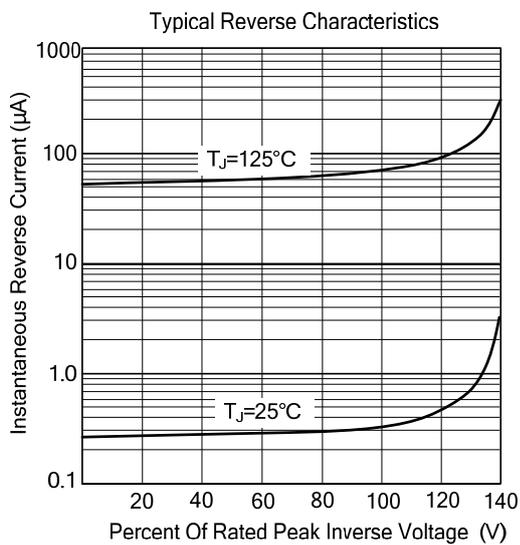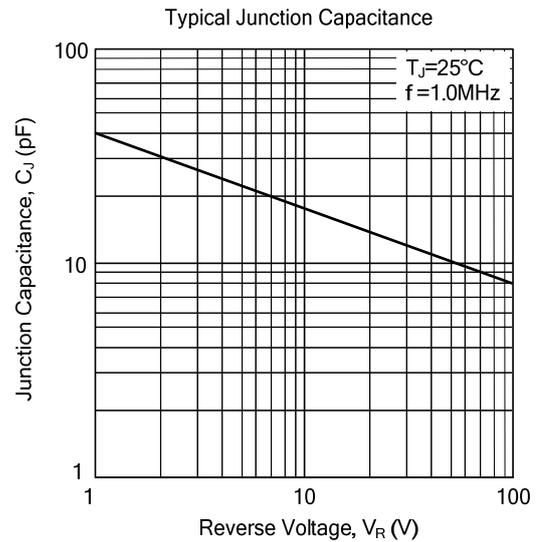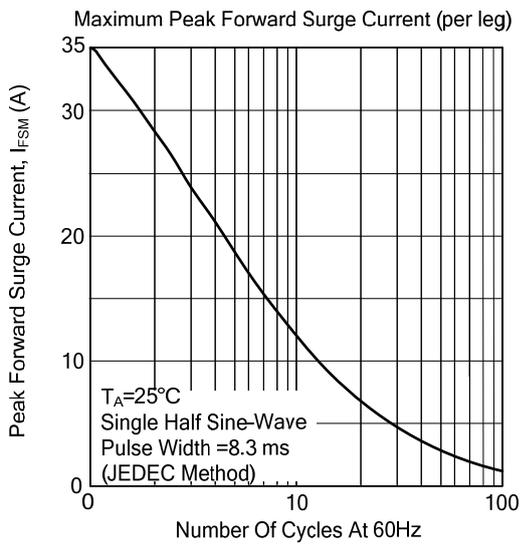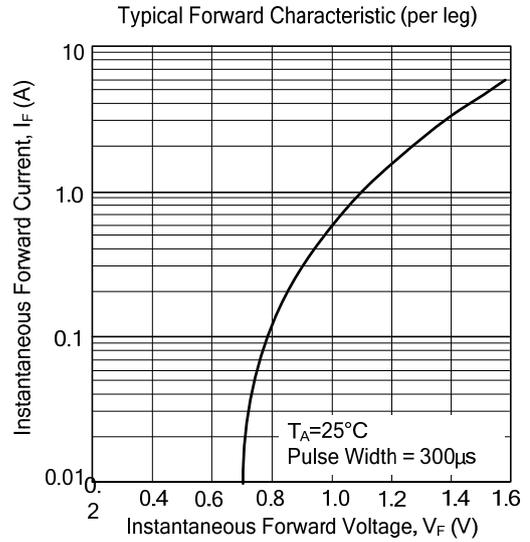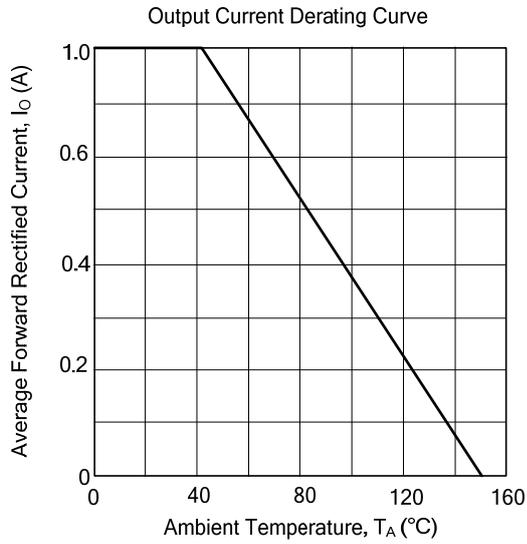

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.