



UTT20N06

Power MOSFET

20A, 60V N-CHANNEL POWER MOSFET

DESCRIPTION


The UTC **UTT20N06** is an N-channel enhancement mode power MOSFET using UTC's advanced technology to provide customers with a minimum on-state resistance and superior switching performance. It also can withstand high energy pulse in the avalanche and commutation mode.

The UTC **UTT20N06** is universally applied in low voltage, such as automotive, high efficiency switching for DC/DC converters and DC motor control.

FEATURES

- * $R_{DS(ON)} < 46m\Omega @ V_{GS} = 10V$
- * Typically 58pF low C_{RSS}
- * High switching speed
- * Typically 21.2nC low gate charge

SYMBOL

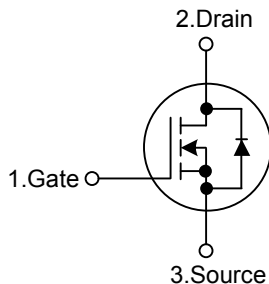


ORDERING INFORMATION


Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
UTT20N06L-TA3-T	UTT20N06G-TA3-T	TO-220	G	D	S	Tube
UTT20N06L-TM3-T	UTT20N06G-TM3-T	TO-220	G	D	S	Tube
UTT20N06L-TN3-R	UTT20N06G-TN3-R	TO-252	G	D	S	Tape Reel
UTT20N06L-TQ2-T	UTT20N06G-TQ2-T	TO-263	G	D	S	Tube
UTT20N06L-TQ2-R	UTT20N06G-TQ2-R	TO-263	G	D	S	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

<p>UTT20N06L-TA3-T</p> <p>(1)Packing Type (2)Package Type (3)Green Package</p>	<p>(1) T: Tube, R: Tape Reel (2) TA3: TO-220, TM3: TO-251, TN3: TO-252 TQ2: TO-263 (3) L: Lead Free, G: Halogen Free and Lead Free</p>
--	--

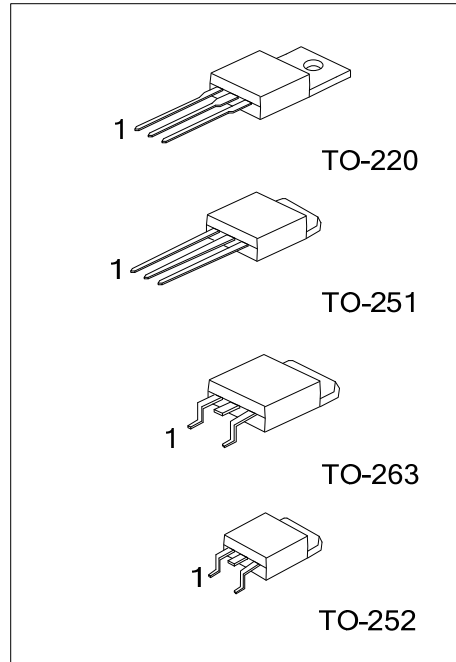

■ MARKING

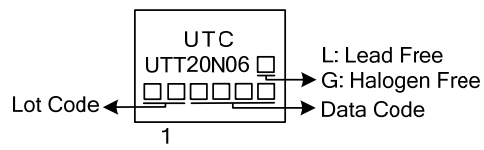

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V_{DSS}	60	V
Gate-Source Voltage		V_{GSS}	± 20	V
Drain Current	Continuous	I_D	20	A
	Pulsed	I_{DM}	80	A
Single Pulsed Avalanche Energy		E_{AS}	170	mJ
Power Dissipation	TO-220/TO-263	P_D	89	W
	TO-251/TO-252		50	W
Junction Temperature		T_J	+150	$^{\circ}\text{C}$
Storage Temperature		T_{STG}	-55 ~ +150	$^{\circ}\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	TO-220/TO-263	θ_{JA}	62	$^{\circ}\text{C/W}$
	TO-251/TO-252		110	
Junction to Case	TO-220/TO-263	θ_{JC}	1.4	$^{\circ}\text{C/W}$
	TO-251/TO-252		2.5	

■ ELECTRICAL CHARACTERISTICS ($T_C=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS							
Drain-Source Breakdown Voltage		BV_{DSS}	$I_D=250\mu\text{A}, V_{GS}=0\text{V}$	60			V
Drain-Source Leakage Current		I_{DSS}	$V_{DS}=60\text{V}, V_{GS}=0\text{V}$			1	μA
			$V_{DS}=48\text{V}, V_{GS}=0\text{V}, T_C=125^{\circ}\text{C}$			10	μA
Gate-Source Leakage Current	Forward	I_{GSS}	$V_{GS}=+16\text{V}, V_{DS}=0\text{V}$			+100	nA
	Reverse		$V_{GS}=-16\text{V}, V_{DS}=0\text{V}$			-100	nA
ON CHARACTERISTICS							
Gate Threshold Voltage		$V_{GS(TH)}$	$V_{DS}=V_{GS}, I_D=250\mu\text{A}$	2.0		4.0	V
Static Drain-Source On-State Resistance		$R_{DS(ON)}$	$V_{GS}=10\text{V}, I_D=20\text{A}$		37.5	46	m Ω
DYNAMIC PARAMETERS							
Input Capacitance		C_{ISS}	$V_{GS}=0\text{V}, V_{DS}=25\text{V}, f=1.0\text{MHz}$		725	1015	pF
Output Capacitance		C_{OSS}			213	300	pF
Reverse Transfer Capacitance		C_{RSS}			58	120	pF
SWITCHING PARAMETERS							
Total Gate Charge		Q_G	$V_{GS}=10\text{V}, V_{DS}=30\text{V}, I_D=20\text{A}, I_G=3.33\text{mA}$		21.2	30	nC
Gate to Source Charge		Q_{GS}			5.6		nC
Gate to Drain Charge		Q_{GD}			7.3		nC
Turn-ON Delay Time		$t_{D(ON)}$	$V_{DD}=30\text{V}, I_D=1\text{A}, R_G=25\Omega, V_{GS}=10\text{V}$		9.5		ns
Rise Time		t_R			60.5	120	ns
Turn-OFF Delay Time		$t_{D(OFF)}$			27.1		ns
Fall-Time		t_F			37.1	80	ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS							
Maximum Body-Diode Continuous Current		I_S		20			A
Maximum Body-Diode Pulsed Current		I_{SM}		80			A
Drain-Source Diode Forward Voltage		V_{SD}	$I_S=20\text{A}, V_{GS}=0\text{V}$			1.2	V

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.