

# UNISONIC TECHNOLOGIES CO., LTD

L11815A **CMOS IC** 

# 1.5A CMOS LDO


#### DESCRIPTION

The UTC L11815A is a COMS linear regulator. One of it's feature is very low guiescent current typical as low as 45µA and its dropout voltage is extremely low with 1.5A output current.

The internal circuit includes thermal shutdown and current fold-back mechanism to prevent device failure when the circuit is operated in the bad conditions.

In application, the UTC L11815A needs a low noise, regulated supply. For stable operation, the output capacitance value should be  $4.7\mu F$  or more.

The UTC L11815A is an ideal for battery applications, such as instrumentations, portable electronics, wireless devices, PC peripherals, and battery powered widgets. The output voltage values are set during manufacturing and the accuracy is tighten 1.5%.

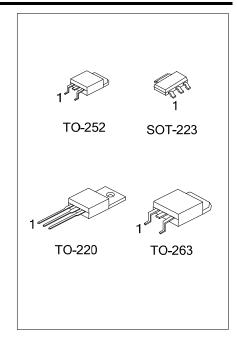


#### **FEATURES**

- \* Quiescent Current (45µA typ.)
- \* Very Low Dropout Voltage
- \* Guaranteed 1.5A output
- \* Accuracy: ±1.5%
- \* Over-Temperature ShutDown
- \* With Current Limiting
- \* Short Circuit Current Fold-Back
- \* Low Temperature Coefficient

## ORDERING INFORMATION

Ordering	Doolsone	Din Assimpment	Deekine		
Lead Free	Halogen Free	Package	Pin Assignment	Packing	
-	L11815AG-xx-AA3-x-R	SOT-223		Tape Reel	
L11815AL-xx-TA3-x-T	L11815AG-xx-TA3-x-T	TO-220	A: GOI	Tube	
L11815AL-xx-TN3-x-R	L11815AG-xx-TN3-x-R	TO-252	D: IGO	Tape Reel	
L11815AL-xx-TQ2-x-R	L11815AG-xx-TQ2-x-R	TO-263	D. 160	Tape Reel	
L11815AL-xx-TQ2-x-T	L11815AG-xx-TQ2-x-T	TO-263		Tube	

Note: Pin Assignment: G:GND O:V<sub>OUT</sub> I:V<sub>IN</sub> xx: Output Voltage, refer to Marking Information.

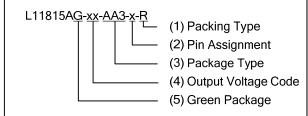


- (1) R: Tape Reel, T: Tube
- (2) refer to Pin Assignment
- (3) AA3:SOT-223,TA3: TO-220,TN3:TO-252, TQ2:TO-263
- (4) xx: Refer to Marking Information
- (5) G: Halogen Free and Lead Free, L:Lead Free

L11815A cmos ic

# **■ MARKING INFORMATION**

PACKAGE	VOLTAGE CODE	MARKING
SOT-223	15: 1.5V 18: 1.8V 19: 1.9V - 25: 2.5V 28: 2.8V 33: 3.3V	Pin Code L11815AG  Voltage Code Date Code  1 2 3
TO-252 TO-263 TO-220		UTC L: Lead Free G: Halogen Free Lot Code Voltage Code  L Date Code  L Date Code  L Date Code

# ■ BLOCK DIAGRAM

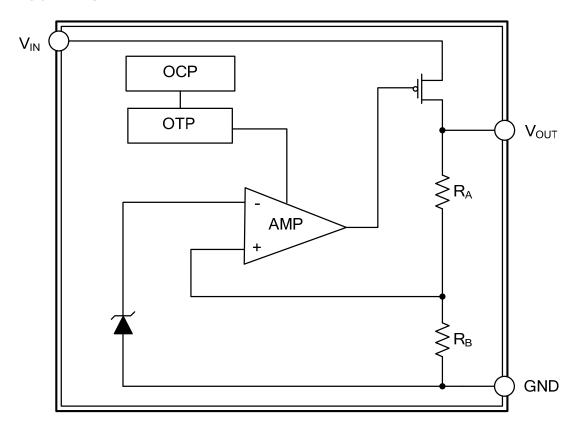

L11815A cmos ic

# ■ ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	$V_{IN}$	-0.3 ~ +8	V
Output Voltage	$V_{OUT}$	GND - 0.3 ~ V <sub>IN</sub> + 0.3	V
Power Dissipation	$P_D$	Internally limited	
Junction Temperature	TJ	150	°C
Operating Temperature	T <sub>OPR</sub>	- 40 ~ +85	°C
Storage Temperature	T <sub>STG</sub>	- 65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

## **■ THERMAL DATA**

PARAMETER		SYMBOL	RATINGS	UNIT	
Junction to Ambient	SOT-223		140		
	TO-220/ TO-263	$\theta_{JA}$	62.5	°C/W	
	TO-252		103		
Junction to Case	SOT-223		15		
	TO-220/ TO-263	$\theta_{JC}$	4	°C/W	
	TO-252		12		

# ■ **ELECTRICAL CHARACTERISTICS** (V<sub>IN</sub> = V<sub>O(Nom)</sub> +2V, T<sub>A</sub> = 25°C, unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Input Voltage	$V_{IN}$			Note		7	V
Output Voltage Accuracy	$V_{OUT}$	I <sub>O</sub> =1mA		-1.5		1.5	%
Line Regulation	ΔVουτ	I <sub>OUT</sub> =1mA	V <sub>OUT</sub> <2.0V	-0.15		0.15	%
	Vout	V <sub>IN</sub> =V <sub>OUT</sub> +1~ V <sub>OUT</sub> +2	V <sub>OUT</sub> ≥2.0V	-0.1	0.02	0.1	%
Load Regulation	ΔVουτ	I <sub>OUT</sub> =1mA ~ 1500mA		4	0.0	1	%
	Vout			-1	0.2	ı	%
Output Current	I <sub>OUT</sub>			1500			mA
Current Limit	I <sub>LIMIT</sub>			1500	2000		mA
Short Circuit Current	I <sub>SC</sub>	V <sub>IN</sub> = V <sub>O(NOM)</sub> +1V, V <sub>OUT</sub> <0.4V			750		mA
Quiescent Current	ΙQ	I <sub>OUT</sub> =0mA			45	70	μA
Ground Pin Current	$I_{GND}$	I <sub>OUT</sub> =1mA ~ 1500mA			45		μA
Drangut Voltage	$V_D$	I <sub>OUT</sub> =1.5A	V <sub>O(NOM)</sub> ≤2.0V			1300	mV
Dropout Voltage		$V_{OUT}=V_{O(NOM)}-2.0\%$	V <sub>O(NOM)</sub> >2.0V			800	mV
Over Temperature Shutdown	OTS				150		°C
Over Temperature Hysteresis	OTH				30		°C
Temperature Coefficient of	T.)/				20		ppm/°
Output Voltage	$T_{C}V_{O}$	_			30		С
Power Supply Rejection	PSRR	I <sub>OUT</sub> =100mA, C <sub>O</sub> =4.7μF	f=100Hz		70		dB
			f=1kHz		50		dB
			f=10kHz		20		dB
Output Voltage Noise	e <sub>N</sub>	f=10Hz ~ 100kHz, I <sub>OUT</sub> =10mA, Co=4.7μF			30		$\mu V_{RMS}$

Note:  $V_{IN(MIN)} = V_{OUT} + V_D$ 

L11815A cmos ic

## **■ DETAILED DESCRIPATION**

The UTC **L11815A** of CMOS regulators insist of a PMOS pass transistor, voltage reference, error amplifier, over-current protection, and thermal shutdown.

The error amplifier, over-current shutdown, and thermal protection circuits provides data for P-channel pass transistor. The error amplifier takes output voltage for a precision reference in the normal operation and the normal operation is restored when the junction temperature drops below 120°C.Over-current and Thermal shutdown circuits start to work when the junction temperature is higher than 150 °C, or the current exceeds 2.2A. The output voltage stays low when the thermal shutdown is in active.

The UTC **L11815A** behaves like a current source when the load reaches 2.2A. But the current would fall back to 600mA to prevent excessive power loss when the load impedance value is below  $0.3\Omega$ .Normal operation is restored when the load resistance value is higher than  $0.75~\Omega$ .


## **■ EXTERNAL CAPACITORS**

The UTC **L11815A** has an output capacitor to ground of  $4.7\mu\text{F}$  or more in the stable operation. Ceramic capacitors can provide the lowest ESR with the best AC performance. Aluminum Electrolytic capacitors, in contrast, have the highest ESR with poorest AC response. Unfortunately, large value ceramic capacitors are comparatively expensive. So we can parallel a  $0.1\mu\text{F}$  ceramic capacitor with a  $10\mu\text{F}$  Aluminum Electrolytic. The result is low ESR, high capacitance, and low overall cost.

A second capacitor is recommended between the input and ground to stabilize input voltage. To get an ideal effect the value of the input capacitor should be at least 0.1µF.

All capacitors should be placed in close proximity to the pins. This can be achieved with a star connection.

### **■ TYPICAL APPLICATION CIRCUIT**

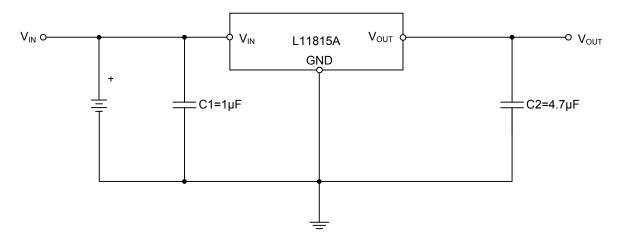

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.