


## MJE13001-Q

### NPN SILICON TRANSISTOR

# NPN SILICON POWER TRANSISTOR

#### FEATURES

- \* Collector-base voltage:  $V_{(BR)CBO}$ =600V
- \* Collector current: I<sub>C</sub>=0.2A




#### ORDERING INFORMATION

Ordering	Deekege	Pin	Assignm	Decking					
Lead Free	Halogen Free	Package	Packing						
-	MJE13001G-Q-x-AB3-A-R	SOT-89	E	С	В	Tape Reel			
-	MJE13001G-Q-x-AB3-F-R	SOT-89	В	С	E	Tape Reel			
MJE13001L-Q-x-T92-F-B	MJE13001G-Q-x-T92-F-B	TO-92	В	С	E	Tape Box			
MJE13001L-Q-x-T92-F-K	MJE13001G-Q-x-T92-F-K	TO-92	В	С	E	Bulk			
Note: Pin assignment: B: Base C: Collector E: Emitter									

MJE13001G-Q-x-AB3-A-R (1)Packing Type (2)Pin Assignment (3)Package Type (4)Rank (5)Green Package	<ul> <li>(1) R: Tape Reel, B: Tape Box, K: Bulk</li> <li>(2) refer to Pin Assignment</li> <li>(3) AB3: SOT-89, T92: TO-92</li> <li>(4) x: refer to Classification of h<sub>FE1</sub></li> <li>(5) G: Halogen Free and Lead Free, L: Lead Free</li> </ul>
---	--

#### MARKING



#### ■ ABSOLUTE MAXIMUM RATINGS

PARAMETER		SYMBOL	RATINGS	UNIT
Collector-Emitter Voltage		V <sub>CEO</sub>	400	V
Collector-Base Voltage		V <sub>CBO</sub>	600	V
Emitter Base Voltage		V <sub>EBO</sub>	7	V
Collector Current		Ι <sub>C</sub>	200	mA
Collector Dower Dissinction	SOT-89	D	550	
Collector Power Dissipation	TO-92	Pc	750	mW
Junction Temperature		TJ	+150	°C
Storage Temperature		T <sub>STG</sub>	-55 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

#### ■ ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25°C, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector-Base Breakdown Voltage	BV <sub>CBO</sub>	I <sub>C</sub> =100μA, I <sub>E</sub> =0	600			V
Collector-Emitter Breakdown Voltage	BV <sub>CEO</sub>	I <sub>C</sub> =1mA, I <sub>B</sub> =0	400			V
Emitter-Base Breakdown Voltage	BV <sub>EBO</sub>	I <sub>E</sub> =100μA, I <sub>C</sub> =0	7			V
Base-Emitter Voltage	V <sub>BE</sub>	I <sub>E</sub> =100 mA			1.1	V
Collector Cutoff Cut-Off Current	I <sub>CBO</sub>	V <sub>CB</sub> =600V, I <sub>E</sub> =0A			100	μA
Collector Emitter Cut-Off Current	I <sub>CEO</sub>	V <sub>CE</sub> =400V, I <sub>B</sub> =0			200	μA
Emitter Cutoff Cut-Off Current	I <sub>EBO</sub>	V <sub>EB</sub> =7V, I <sub>C</sub> =0A			100	μA
ON CHARACTERISTICS	_					
DC Current Coin	h <sub>FE1</sub> *	V <sub>CE</sub> =20 V, I <sub>C</sub> =20mA	10		70	
DC Current Gain	h <sub>FE2</sub>	V <sub>CE</sub> =10V, I <sub>C</sub> =0.25mA	5			
Collector-Emitter Saturation Voltage	V <sub>CE(SAT)</sub>	I <sub>C</sub> =50mA, I <sub>B</sub> =10mA			0.5	V
Base-Emitter Saturation Voltage	V <sub>BE(SAT)</sub>	I <sub>C</sub> =50mA, I <sub>B</sub> =10mA			1.2	V
SMALL-SIGNAL CHARACTERISTICS						
Current Gain Bandwidth Product	f⊤	I <sub>C</sub> =20mA,V <sub>CE</sub> =20V,f=1MHz	8			MHz
Resistive Load	<u>.</u>					
Storage Time	ts	I <sub>C</sub> =50mA, I <sub>B1</sub> =-I <sub>B2</sub> =5mA,			1.5	μs
Fall Time	t <sub>F</sub>	V <sub>CC</sub> =45V			0.3	μs

#### ■ CLASSIFICATION OF h<sub>FE1</sub>\*


RANK	А	В	С	D	E	F	G	Н	I	J	K	L
RANGE	10-15	15-20	20-25	25-30	30-35	35-40	40-45	45-50	50-55	55-60	60-65	65-70



# MJE13001-Q

### NPN SILICON TRANSISTOR

#### TYPICAL CHARACTERISTICS

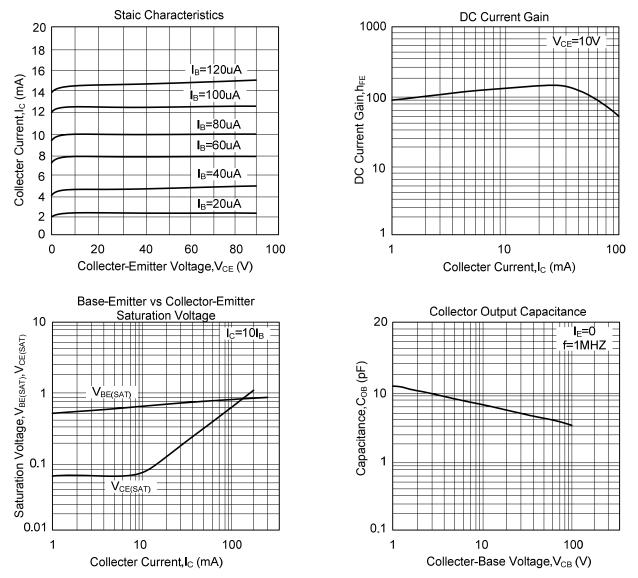

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.

